



512-479-0317 http://poetexas.com



## WS-GPOE-16A-1U load balancing gigabit PoE injector with mode A and split backplane



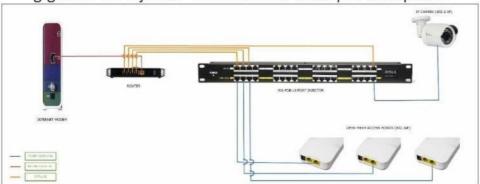



- 16 Port Gigabit Ethernet Injector
  - 16 Shielded RJ-45 LAN
  - 16 Shielded RJ-45 LAN+POE
  - all 4 data pairs active for gigabit data rates
  - $-\,\mathrm{shared}$  data and power via transformer isolated power injection on mode A pairs
- 1U high standard rack mount (1.75 x 19 x 2 inches)
  - 650 ma automatic resettable fuse on each port
- power is equally shared as needed by the devices
- Use with any Ethernet switch passes all management info transparently
- 4 LED status indicators −1 master power GREEN LED
  - for each group of 4 POE sockets:

0 to 100 ma	100 to 1000 ma	over 1000 ma  Yellow	
Off	GREEN		

- Ideal for IP Cameras, VOIP phone, WiFi Access Points with 802.3af or 802.3at or passive
- Technical support from Austin
- Power supply range 24 to 56 volts
  - Dual Power supply inputs (2.1mm x 5.5mm) see table below
  - we offer kits with power supplies

141-44-10-4

Environmental

Normalian at

- operating temperature range 0 to 50 deg C
- storage temperature range 0 to 50 deg C  $\,$
- relative humidity range 5 to 90% non condensing
- $-\,\mbox{FCC}$  rules  $-\,\mbox{there}$  are no RF emitting devices in the design
- the device is PELV per NFPA standard 79, protected extra low voltage
- no cooling is required, no fans. Quiet operation
- Use either power input if two supplies are used, each half receives power from that side only

Usage	Input	Number of attached PSU	Watts/Port Max	Note
802.3at (active)	56 volts		30	Please see the WT-AT series of active 802.3at injectors
802.3at (passive)	56 volts	1	30	up to 150 watts total
		2	30	up to 150 watts on 1-8 and 150 watts on 9-16
802.3af (passive)	48 volts	1	30	up to 150 watts total
		2	30	up to 150 watts on 1-8 and 150 watts on 9-16
802.3af (passive)	48 or 56	2	30	2x 150 watts supplies, automatic failover if one supply
redundant				fails.
Passive 24v	24 volts	1	15	Mikrotik, UBNT – undocumented mode A support in
		2	15	some devices.