



UNIVERSAL ANTENNA MOUNT

The UM/L universal antenna mounting systems consist of a universal bracket and choice of 2 different length mounting tube for the most demanding customer premises antenna mounting applications. The construction is better than many of these type of mounts which are only light gauge painted steel. The Laird Technologies mounts are heavy gauge steel which goes through a galvanization (plating) process and then are powder coat painted for extra protection from the elements. Fasteners used are stainless steel. The mounting tubes have 2 sets of holes to give maximum angular flexibility during installations. The mounting systems feature a universal mounting bracket with a full 90° of tilt which allows for greater versatility when dealing with the variety of installation challenges found at customer sites. Their low profile and attractive styling make it ideal for installations on various styles of buildings and in all neighborhoods, including upscale neighborhoods.


FEATURES

- Attractive styling
- Galvanized steel with grey powder coat paint
- Full 90° tilt adjustment
- 1.5 in heavy duty steel tube for greater strength
- Extremely versatile
- Supports 150 lbs. load in both axis
- 2 Sets of holes in tube for more angular flexibility
- Base accepts Laird Technologies standard U-Bolts for pole mounting

APPLICATIONS

- Customer premises equipment
- Roof or wall mounting
- Under-eave mounting
- Interior or exterior
- WiMAX


MECHANICAL SPECIFICATIONS: UM

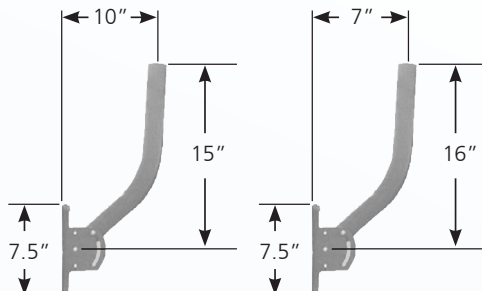

NOTES

1. Dimensions in Inches
2. 1.5 in Diameter Heavy Duty Tube
3. 90° Adjustable Tilt
4. Mounting Flange 6 in Wide
5. Galvanized Steel; Grey Epoxy Powder Coat Paint
6. All shipments F.O.B. Schaumburg, IL 60173


MECHANICAL SPECIFICATIONS: UML

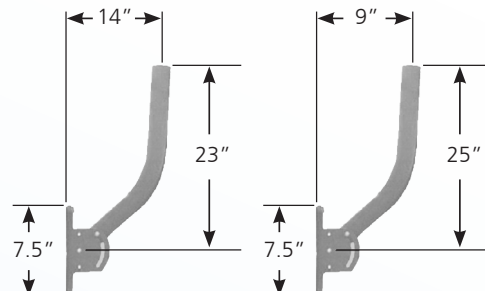

SYSTEM ORDERING

- UM – Universal Mount
- UML – Universal mount, Extra Long
- UM-UB – U-Bolt Kit for Pole Mount

UM with UM-UB
U-Bolt Kit



global solutions: local support™

Americas: +1.847.839.6907
IAS-AmericasEastSales@lairdtech.com

Europe: +1.32.80.7866.12
IAS-EUSales@lairdtech.com

Asia: +1.65.6.243.8022
IAS-AsiaSales@lairdtech.com

www.lairdtech.com

ANT-DS-UM/L 0611

Any information furnished by Laird Technologies, Inc. and its agents is believed to be accurate and reliable. All specifications are subject to change without notice. Responsibility for the use and application of Laird Technologies materials rests with the end user, since Laird Technologies and its agents cannot be aware of all potential uses. Laird Technologies makes no warranties as to the fitness, merchantability or suitability of any Laird Technologies materials or products for any specific or general uses. Laird Technologies shall not be liable for incidental or consequential damages of any kind. All Laird Technologies products are sold pursuant to the Laird Technologies Terms and Conditions of sale in effect from time to time, a copy of which will be furnished upon request. © Copyright 2011 Laird Technologies, Inc. All Rights Reserved. Laird, Laird Technologies, the Laird Technologies Logo, and other marks are trade marks or registered trade marks of Laird Technologies, Inc. or an affiliate company thereof. Other product or service names may be the property of third parties. Nothing herein provides a license under any Laird Technologies or any third party intellectual property rights.