

Getting Started Guide

AirSpot 1310 CPE-CBSD

December 2020



Contents

1	General.....	3
2	Instructions	3
2.1	Entering the webGUI with Administrator Credentials	3
2.2	Setting APN #1 Name.....	3
2.3	Setting APN #2 Name (typically used in customer networks).....	4
2.4	Entering CBRS SAS URL and User-ID	5
2.5	CPE-CBSD Installation Parameters for “WInnForum CPI Multi-Step”	6

1 General

Getting Started Guide for Airspan CPE-CBSD AirSpot 1310.

2 Instructions

Note: This guide is intended for the customer technicians when installing the device.

2.1 Entering the webGUI with Administrator Credentials

- Enter the SIM card into the device (when device is still powered off)
- Connect a laptop/PC Ethernet LAN card to the CPE-CBSD
- Power on the device (using PoE)
- Open Google Chrome on the laptop/PC, and type <http://192.168.0.1> to access the webGUI.




- Enter the username: superadmin Enter the password: admin (**Note:** these are the administrator credentials for the technician)

2.2 Setting APN #1 Name

- Go to Setting → Network → APN Management
- Verify the “APN Number” shows #1
- Verify the “Status” is checked to “Enabled”.
- Enter the APN #1 Name according to the network
- Verify the “Default Gateway” is checked to “Enabled”
- Check the TR069 checkbox (in case customer has TR-69 server in its network)
- Press the Submit Button

Important Note: APN #1 is the Management APN communicating over internet with the CBRS SAS and NTP Server.


Important Note: Correct UTC timing of the CPE-CBSD device is mandatory for correct communication with CBRS SAS. CPE-CBSD device needs to receive as part of LTE ATTACH process the correct UTC time as part of S1-NAS EMM message (customer 4G EPC needs to provide this correctly).

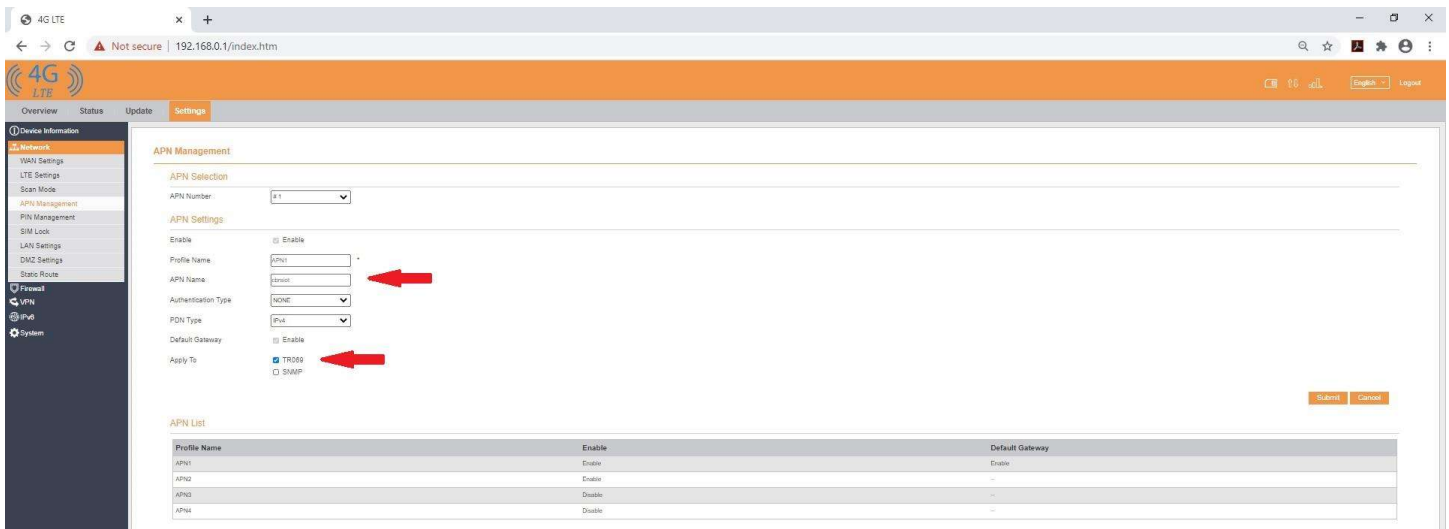

2.3 Setting APN #2 Name (typically used in customer networks)

Important Note: If customer network is designed to operate with APN #1 only, then APN #2 is not configured in the CPE-CBSD. Skip this section and continue to the next section.

- Typically in customer networks there are 2 APNs: APN #1 for Device Management and APN #2 for end user data.
- Go to Setting → Network → APN Management
- Select the “APN Number” to #2
- Check the “Status” to “Enabled”.
- Enter the APN #2 Name according to the network
- Verify the “Default Gateway” is NOT checked
- Verify the TR069 is NOT checked
- Verify the SNMP is NOT checked
- Press the Submit Button

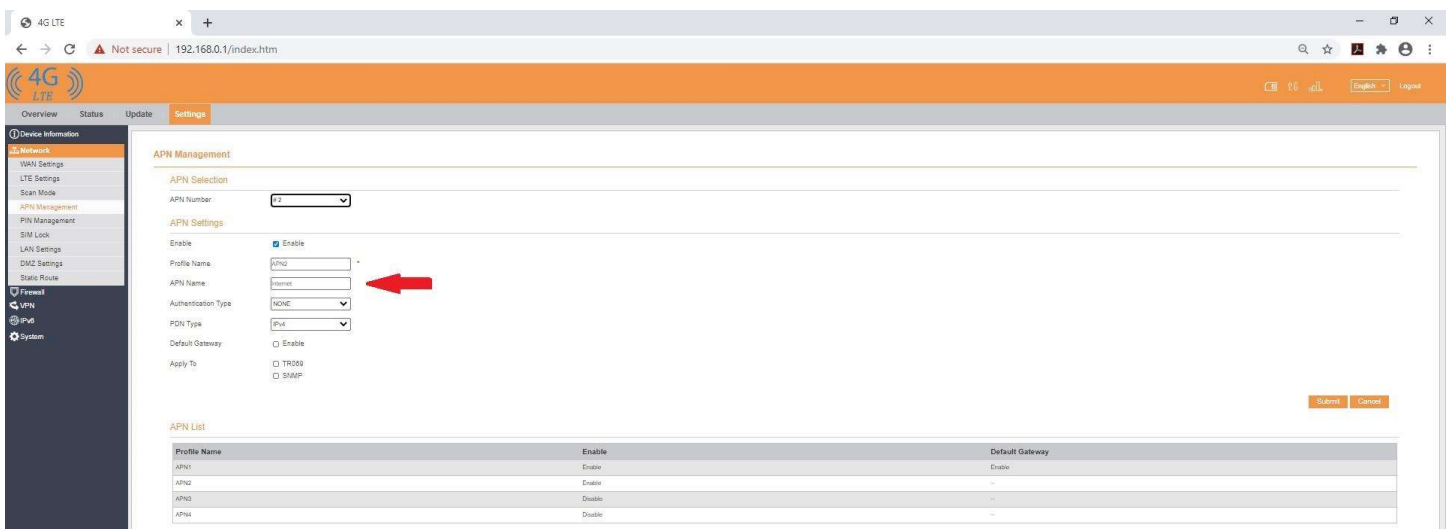

2.4 Entering CBRS SAS URL and User-ID

- Go to Setting → System → CBSD
- Verify the “Certificate Information” exists with Validity until 2030

Important Note: the CPE-CBSD comes from factory with a built-in certificate valid for operation with any commercial SAS. If the “Certificate Information” is empty, the device is malfunctioning and needs to be returned to Airspan for repair.

- Enter in “Registration Parameters” the following:
 - “User ID” according to the commercial User ID received when establishing the contract with SAS
 - “SAS URL” according to commercial SAS URL. Do NOT enter the https:// as part of the URL.

Note: Sometimes SAS declare their URL ending with /v1.2. Do NOT enter the /v1.2 as part of the URL.

- Press the “Submit” button

The screenshot shows the 'CBSD Settings' page in a web browser. The 'Registration Parameters' section includes input fields for 'User ID', 'FCC ID' (pre-filled with 'PIDAS1310CPE'), 'SAS URL', and 'SAS Renewal Planes' (pre-filled with '20'). The 'SAS URL' field has a red arrow pointing to it. Below this is the 'Status' section showing 'Register Status' as 'Un-Registered'. The 'Certificate Information' section displays details for a 'Current Certificate' and an 'Issued' certificate, both with validity until 2030. The 'Upload Certificate' section has buttons for 'Certificate', 'CA Certificate', and 'Private Key'.

- Go to Settings → System → Maintenance
- Press the “Regular Reset” button
- The device will reboot automatically

Important Note: this CPE-CBSD device is certified under FCC Part 96 rules. The CPE-CBSD will NOT pass user data traffic until reaching AUTHORIZED state from CBRS Commercial SAS.

Important Note: this CPE-CBSD device is certified under FCC Part 96 rules. This device is a Category B CBSD which must be professionally installed. For this CPE-CBSD the method of entering the CBRS Installation Parameters to SAS is “WInnForum CPI Multi-Step” (see next section for details).

2.5 CPE-CBSD Installation Parameters for “WinnForum CPI Multi-Step”

The AirSpot1310 CPE-CBSD device is certified under FCC Part 96 rules. This device is a Category B CBSD which must be professionally installed. For this CPE-CBSD the method of entering the CBRS Installation Parameters to SAS is “WinnForum CPI Multi-Step”.

The Mandatory CBRS Installation Parameters to be entered in SAS portal by WinnForum CPI are the following:

- FCC-ID: PIDAS1310CPE (verify this FCC-ID on the label of the device)
- Serial Number: according to the label of the device
- Category: B
- Deployment Type: Outdoor
- Location: according to the location of the device taken by the WinnForum CPI
- Antenna Parameters:
 - Gain: 16dBi
 - Horizontal Beam Width: 60 degrees
 - Azimuth: according to the azimuth of the device taken by the WinnForum CPI
 - Down Tilt: according to the down tilt of the device taken by the WinnForum CPI

Important Note: For some SAS portals, the WinnForum CPI also must enter “CBSD Type: CPE” (NOT “CBSD Type: Base Station”)