


GP-24-3R (3-deg downtilt)



2.4GHz Omnidirectional Base Antenna

Specifications

- 2400-2500Mhz
- 3 degree downtilt
- VSWR: Less than 1.5:1
- Gain: 12dBi
- Length: 5 ft 10 inches
- Weight: 2 lbs 9 oz
- -3dB Beam-width: 5 degrees
- Cross polar rejection: 14dB+
- Max Power: 100 watts
- Max Wind Survival: 135MPH
- Wind Load: 35.3 sq in (.245 sq ft)
- Mast Required: 1.25-2.5 inches
- Connector: Integral N- female
- Radome: One piece white UV stabilized fiberglass
- Extruded aluminum/stainless steel mounting hardware included
- RoHS Compliant

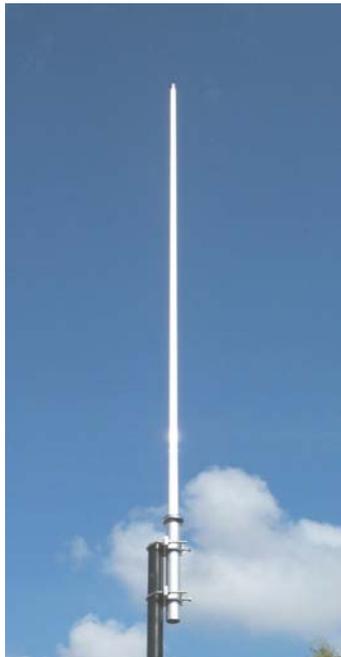

NCG Company

15036 Sierra Bonita Lane
Chino, CA 91710-8901


Phone: 800.962-2611

909-393-6133

Fax: 909-393-6136

email: sales@natcommgroup.com

Vertical radiation pattern

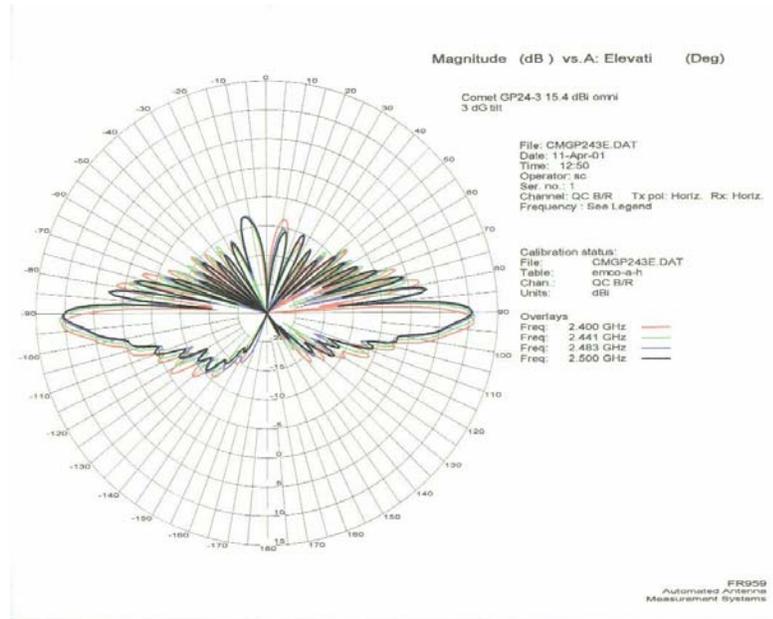

FEATURES

- Extremely high gain omnidirectional pattern with 3 degree downtilt for long range point-to-multipoint applications.
- Heavy duty fiberglass radome, 134+ MPH wind survival.
- Extruded aluminum mounting brackets, stainless steel U-bolts/hardware.
- Mounting pipe acts as a shroud to protect the coax to antenna connection from the weather.
- Ideal for the license free 2.4GHz ISM band 802.11b and 802.11g standards.

Manufactured by: Comet Company Ltd.

