


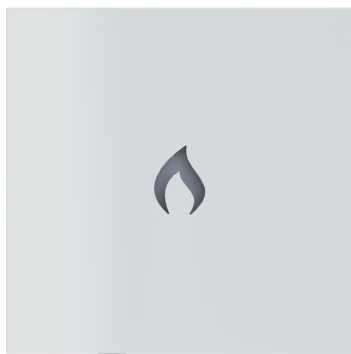

Product Overview

IgniteNet™'s Spark™ AC is the most cost-effective, cloud-managed 802.11ac access point on the market. The Spark™ AC contains 2 independent, concurrent operation radios - one 802.11ac (5GHz) radio and one 802.11n (2.4GHz) radio - capable of delivering blisteringly fast wireless speeds. The ultra-small size of the Spark™ AC allows it to be placed inconspicuously in both offices and homes, bringing fast wireless connections to hard-to-reach locations.

Key Features and Benefits

Cloud-Enabled Networking

The IgniteNet™ Spark™ AC is cloud-enabled out of the box allowing for easy, highly scalable installation, configuration, and management.

Dual Band AC750 Operation

The Spark™ AC is capable of operating simultaneously at 2.4GHz (802.11b/g/n) as well as 5GHz (802.11a/n/ac) to supply ample throughput for the most demanding applications.


Powerful, Flexible Configuration

The Spark™ AC can operate either as a stand-alone access point or as a coordinated, cloud-managed access point, easily meeting the requirements of any installation.

Robust Yet Simple Mounting Options

The Spark™ AC can be wall, ceiling, or desktop mounted, greatly simplifying installations in both offices and homes.


Product Views



Top



Side

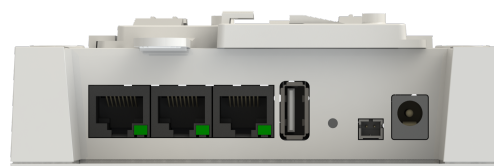

I/O Region (all models)



Spark™ AC

Cloud-Enabled Enterprise AP

Features

HARDWARE FEATURES

- ✓ 1x Gigabit Ethernet Port (PoE IN)
- ✓ 2x 10/100 Fast Ethernet Ports
- ✓ 1x USB 2.0 Port
- ✓ Dual flash image support

LEDs

- ✓ Power, Ethernet, Wireless, Health/Status, Controller Status

DIMENSIONS (L x W x H)

- ✓ 120 x 120 x 25 mm

WEIGHT

- ✓ TBD g

POWER

- ✓ 12V/1A DC
- ✓ Passive Power over Ethernet
- ✓ 802.3af Power over Ethernet (3AF model only)

OPERATING ENVIRONMENT

- ✓ Operating Temperature: 0C° to +50C°
- ✓ Store Temperature: -40C° to 70C°
- ✓ Operating Humidity: 10 to 90% non-condensing (RH)

REGULATORY / STANDARDS COMPLIANCE

- ✓ FCC/IC
- ✓ CE

RF PERFORMANCE (TX)

- ✓ 2.4GHz:
27dBm @ 6Mbps, 23dBm @ 300Mbps
- ✓ 5GHz (AC750 models only):
23dBm @ 6Mbps, 19dBm @ 433Mbps

RF PERFORMANCE (RX)

- ✓ 2.4GHz:
TBD
- ✓ 5GHz:
TBD

KEY FEATURES

- ✓ Supports Service Provider and Enterprise type networks
- ✓ Stand-alone or Cloud-controlled operating modes
- ✓ AP/Client/Client WDS modes with Flexible Bridging and Routing
- ✓ 802.11a/n/ac 1x1 (AC750 models only) + 802.11b/g/n 2x2, Dual Band Dual Concurrent (2.4GHz and 5GHz)
- ✓ Supports up to 8 SSIDs per radio
- ✓ IEEE802.e Wi-Fi Multimedia (WMM-QoS)
- ✓ WEP, WPA,WPA2-PSK,WPA2-AES, PSK and Enterprise
- ✓ Admission control by client MAC address
- ✓ Supports bandsteering and assisted roaming

APPLICATIONS

- ✓ Enterprise AP
- ✓ 3G/4G Offload
- ✓ Managed WiFi Services
- ✓ Managed Home/SMB Gateway

Ordering Information

Part Number	Description
SP-N300-XX	Spark™ N300 - Single-Band Enterprise AP w/ integrated antennas
SP-AC750-XX	Spark™ AC750 - Dualband Concurrent Enterprise AP w/ integrated antennas
SP-AC750-3AF-XX	Spark™ AC750 - Dualband Concurrent Enterprise AP w/ integrated antennas (+3af)

****XX is used to denote localization (US, EU, AU, CN)**

Contact



Worldwide
20 Mason
Irvine, CA 92618
USA
sales@ignitenet.com

Asia
No. 1 Creation Road III,
Hsinchu Science Park,
30077, Taiwan, R.O.C.
sales@ignitenet.com

Fire Up Your Network™ ...

Enterprise Wireless | Broadband Wireless | Fiber

www.ignitenet.com