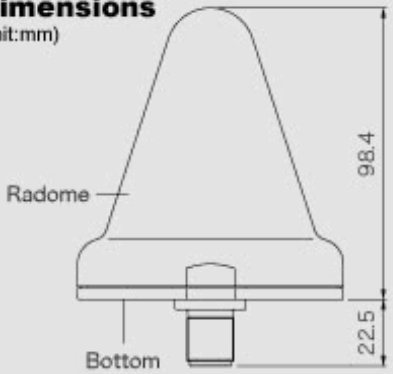
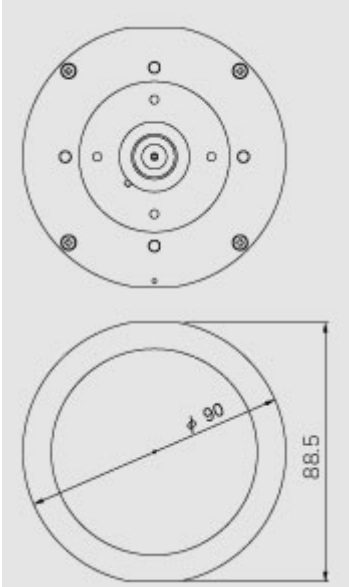


Product Specification

Electrical	Frequency Range	1575.42MHz \pm 1.023MHz
	Polarization	Right-hand circular
	Total Gain	38dBi typical
	Attenuation	60dB typical at 1575.42MHz \pm 50MHz
	Noise Figure	1.8dB typical (< 2.2dB)
	VSWR	1.5 typical (< 2.5)
	Operating Voltage	DC5V \pm 0.5V
Environmental	Operating Current	20mA typical (< 27mA)
	Operating Temperature	-40~85°C
	Storage Temperature	-45~90°C
	Immunity to lightning surge	IEC61000-4-5 Level4

*This product is compliant with the European RoHS Directive.

<p>■ Dimensions (Unit:mm)</p>  <p>Radome</p> <p>Bottom</p>	
<p>Weight: Approx. 187g Radome: Polycarbonate Bottom: Die-cast aluminum</p>	