


Peelable Micro Drop Cable Optitap-SCAPC Non-Toneable

Cable Diagram

Cyclone Dielectric Peelable Micro Flat Drop SM (end1) Nylon Tight Buffer SC/APC Pulling Eye (end2) OPTitap compatible G.657.A1 On Reel

Available in 50FT increment lengths from 50FT to 600FT

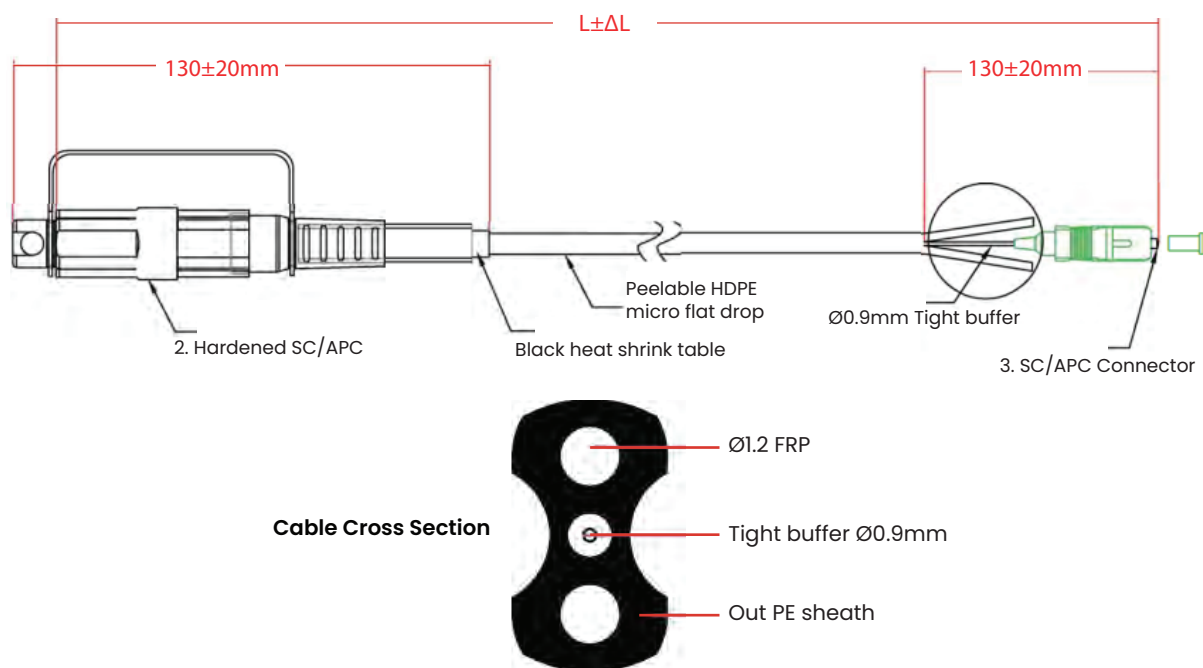

Name

Description

Cabel	3.0x5.3x6.6mm black PE cable
Connector A	Hardened SC/APC connector
Connector B	SC/APC connector

Technical Requirements

$IL \leq 0.3 \text{dB}$, $RL \geq 60 \text{dB}$;

ΔL : , $\Delta L: \pm 30.48 \text{mm}$; $L > 2133.6 \text{mm}$, $\Delta L: \pm 6.096L$ The unit of L is mm;

The tearing force between two FRP reinforcement members and 0.9mm tight-buffered optical fiber in the optical cable is $\leq 20 \text{N}$;

The outer end of the connector is a SC/APC connector, which contains a pull eyes. The inner end is hardened SC/APC, without pulling eyes.