


Product Data Sheet

☎ 1-855-276-(KPPA) 5772 or 780-702-7577
 ✉ info@kppperformance.ca
 ✉ 15497 117 Ave, Edmonton, AB T5M3X4, Canada
 ✉ 5000 W. Proviso Dr, Unit #2 Melrose Park, IL 60163, USA





Part Number		KPPA-2GHZ-DPOMA-WC-2	
Electrical		Mechanical	
Frequency range	2300-2600 MHz	Dimensions	56" x 4" x 6"
Polarization	Vertical and Horizontal	Weight	11 lb
Gain	13 dBi	Mounting method	Mast
Elevation 3dB beamwidth	7 °	Mounting pole dia	1.6 – 2.4"
Electrical Downtilt	1 °	Radome material	UV resistant PVC
VSWR	< 1.8:1	Environmental	
Return loss	> 11 dB	Temperature range	-40° to +65° C / +150° F
Cross-pol ratio	> 20 dB	Wind speed	210 km/h / 130 mph
V-H port isolation	> 30 dB	UV protection	UV resistant PVC
Input power	50 W max per port	Ingress protection	IP55 rain resistant
Impedance	50 Ω	Lightning protection	DC Ground
Connector Type	Type N Female x 2		

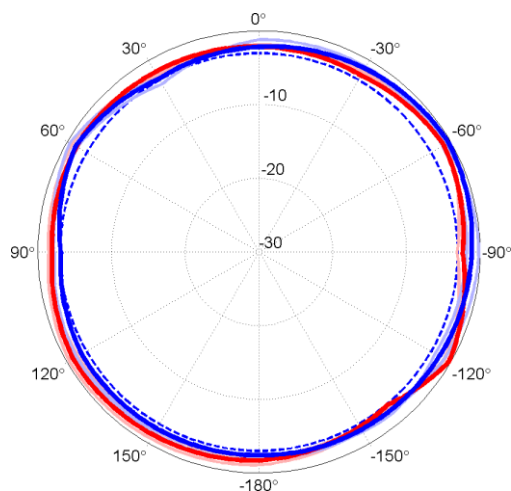


Azimuth
patterns

Elevation
patterns

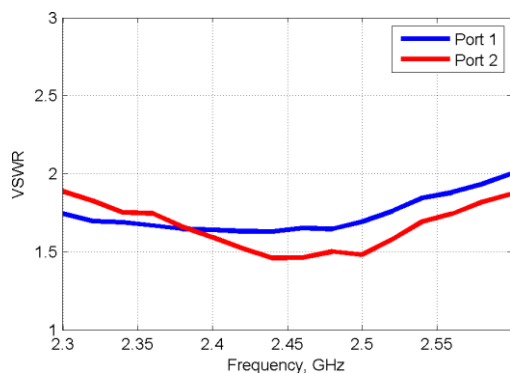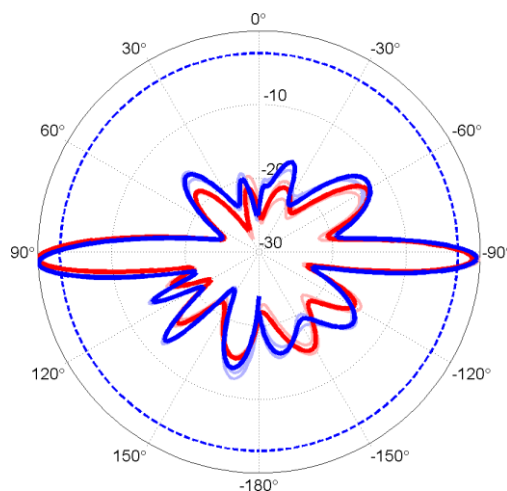

VSWR

Gain

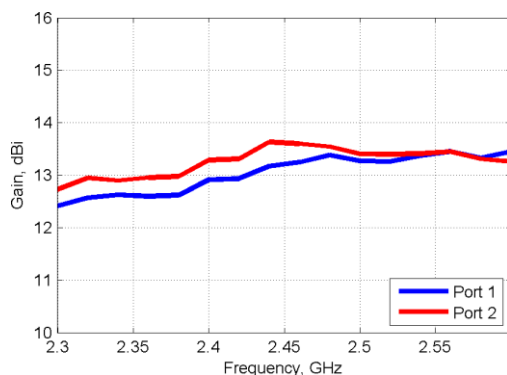

ANTENNAS ENGINEERED & MANUFACTURED TO EXCEED INDUSTRY STANDARDS