

We offer expert support direct from our headquarters in Austin, Texas.

512-479-0317

Call us 8am - 6pm (Central)
Monday through Friday

or email us at
service@poetexas.com

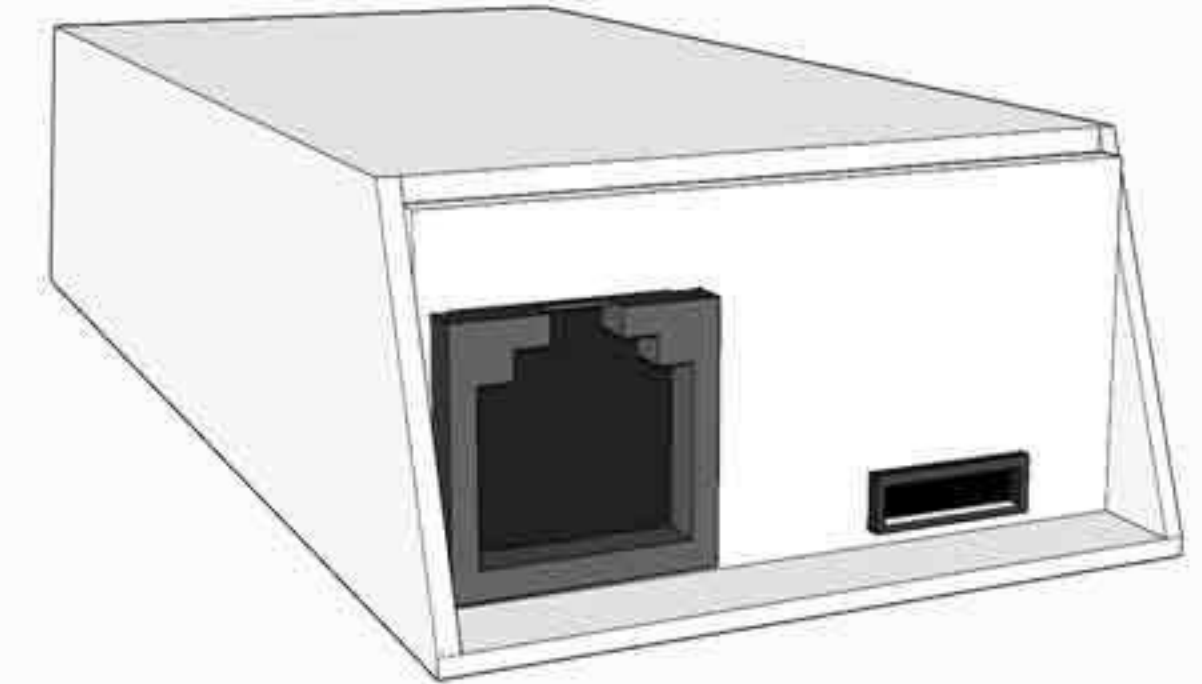
Features

RJ-45 connectors, one female for IEEE 802.3at compliant or compatible power.

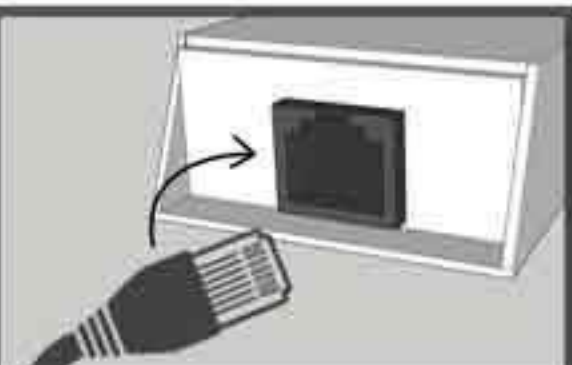
USB-C female output with auto Power Delivery (5v/3A, 12v,2A, 15V,1.5A, 20V,1A)

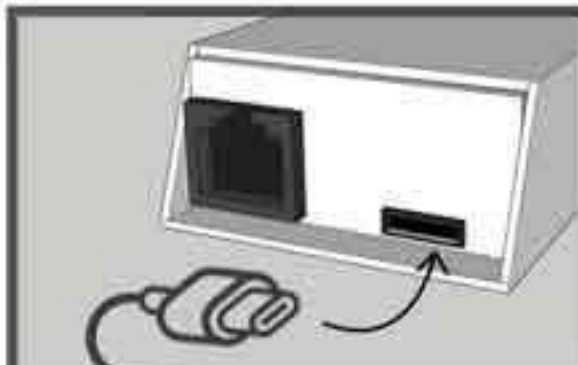
Applications

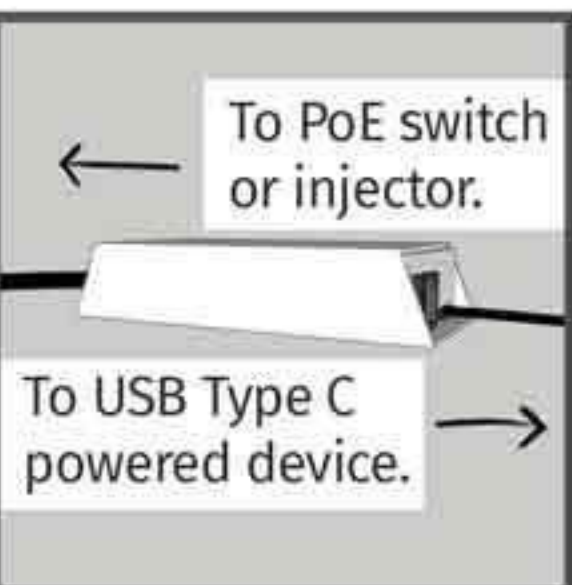
Converts PoE+ to USB Type C power for devices like iPad Pro, Macbook Pro, and Nest Cam.



Quick Start Guide

- 

Connect powered* Ethernet cable to RJ45 on input side.
- 

Connect USB Type C cable to USB jack on output side.
- 

To PoE switch or injector.

To USB Type C powered device.
- 

Output RJ45 provides Gigabit data if needed.

*Power source must be an 802.3at compliant PoE switch or injector.

Technical Specifications

Connector Types	USB Type C
Data Rate	10/100/1000
Dimensions	4x2x1 in
Efficiency	90%
Input Voltage Range	44-56 volts (IEEE 802.3at compliant)
LEDs Per Port	Green (POE) / Yellow (USB-C)
Max Power for Kit	25 watts
Mount Type	Wall or DIN rail clips
Operating Humidity	5% to 90%
Operating Temperature Range	-10 - 60C
Output Voltage	5v/3A, 12v,2A, 15V,1.5A, 20V,1A
PoE Method	IEEE 802.3at / PoE+ / Passive 30 watt
PoE Mode/Pinout	Mode A/B
PoE Standard	IEEE 802.3at
Power Input	25.5 watts
Weight	3 oz