






☎ 1-855-276-(KPPA) 5772 or 780-702-7577
 💻 info@kppperformance.ca
 ✉ 15497 117 Ave, Edmonton, AB T5M3X4, Canada
 ✉ 3000 West Commerce, Dallas, TX 75212, USA

Part Number		KPPA-23-3GHZDPFHA	
Electrical		Mechanical	
Frequency range	3300-3800 MHz	Dimensions	23 x 20 x 25"
Polarization	V+H or +-45° slant	Weight	12 lb
Gain	23.5 dBi	Mounting method	Carriage bolts
Beamwidth 3dB	12.3 °	Mounting pole dia	1¼" – 4"
VSWR	< 1.5:1	Surface Finish	Matt powder coat
Return loss	> 14 dB	Environmental	
F/B ratio	> 32 dB	Temperature range	-40° to +60° C / +140° F
Cross pol rejection	> 25 dB	Wind speed	160 km/h / 100 mph
V/H port isolation	> 20 dB	UV protection	UV resistant powder coat
Input power	25 W max per port	Ingress protection	IP54 rain resistant
Impedance	50 Ω		
Connector Type	Type N Female x 2		

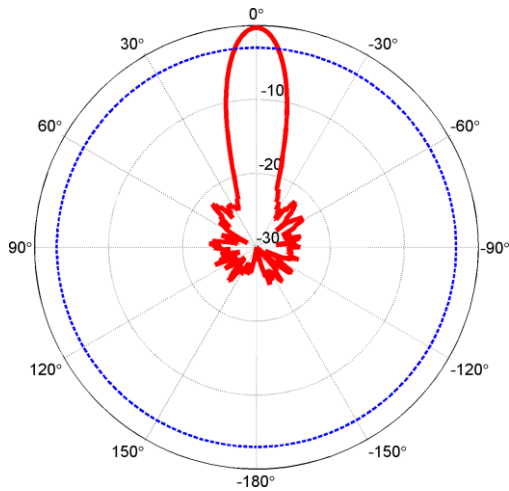

Azimuth patterns

Elevation patterns

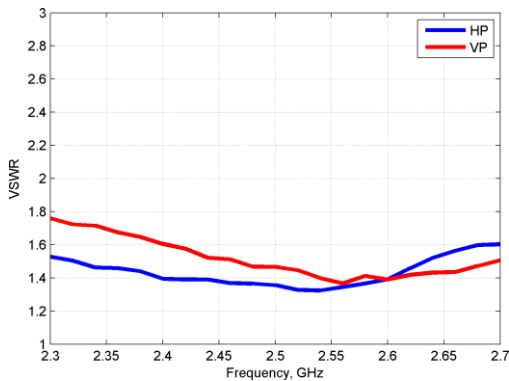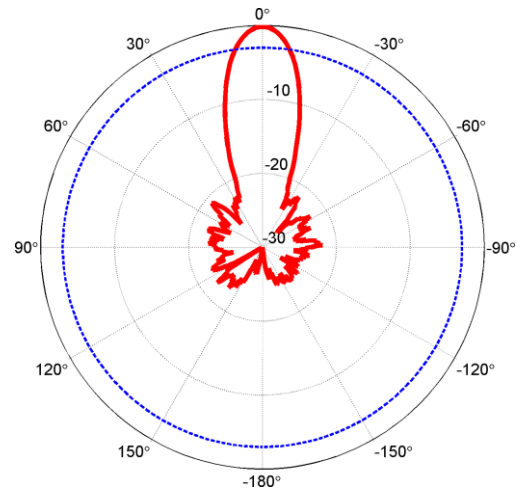

VSWR

Gain

