



## SECTOR-L 50018\_3x3MIMO

### Key Features:

- 3x18 dBi Sectorial Gain
- Three Polarizations V&H&V in One Case
- Special Outdoor Weatherproof Enclosure
- Highest Ingress Protection IP 66
- High Quality Construction
- Minimized Sidelobes Level
- Heavy-Duty Mounting Elements
- Easy Elevation and Tilt Adjustment
- 5 Years Warranty
- Designed for All Weather Operation



### Applications:

- 5 GHz Band Wireless LAN
- 3x3MIMO standard
- IEEE 802.11a/n WLAN Systems
- Point to Multipoint Applications

### Description:

Sector antenna working in 5 GHz band with 3x18 dBi gain, three polarizations for 3x3 MIMO applications, Because of reduced sidelobes, antenna keeps clear strong signal even in crowded radio environment. It's resistant to interference from other networks and does not disturb to other. Antenna features no beam squint due to frequency change, it means that decreasing of data throughput or even loss of a link after frequency channel change does not occur. Perfectly designed for operation under severe weather conditions. A proper materials allow operation in the salt water environment without corrosion. Professional mounting system with 0-15 degrees scale guarantees easy and smooth tilt down as well as rock-stable operation.

## Electrical Properties

Frequency	5.15
Gain	3x18dBi
Polarization	V&H&V
Beamwidth deg horizontal	90°(-3dB), 120°(-6dB)
Beamwidth deg vertical	6°
VSWR	<1,8
Impedance	50 ohm
Front to back ratio	> 35 dB


## Enclosure Properties

Technology:	Microstrip
Material:	UV protected
Colour:	White
Ingress Protection (EN 60529):	IP 66
Min temperature:	-40
Max temperature:	120


## Mechanical Properties

Input Connector	N-type / female
Wind Load	<60N@160Kmh
Outside Dimensions	550x220x80mm
Weight	1.5kg / 3.3lbs

Specification subject to change without notice.

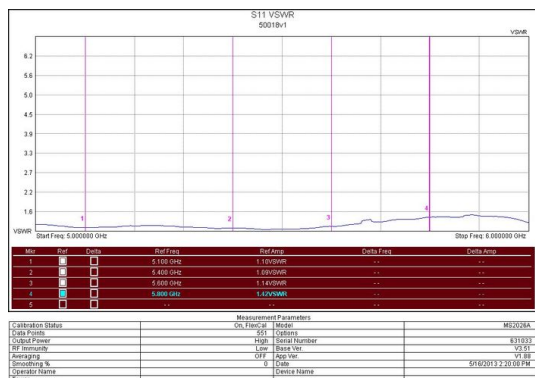

VSWR port V

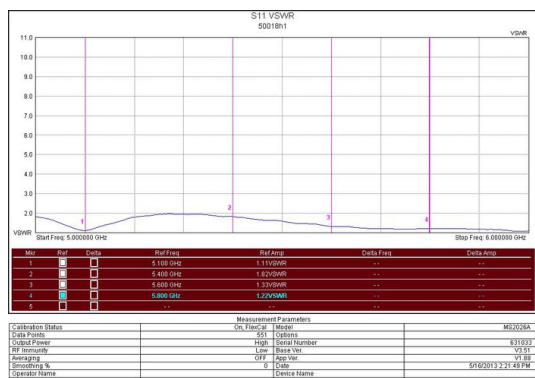

VSWR port H