

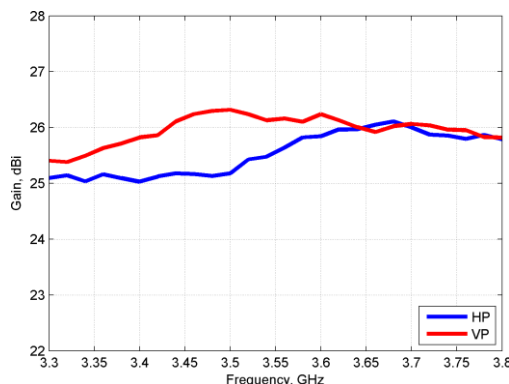
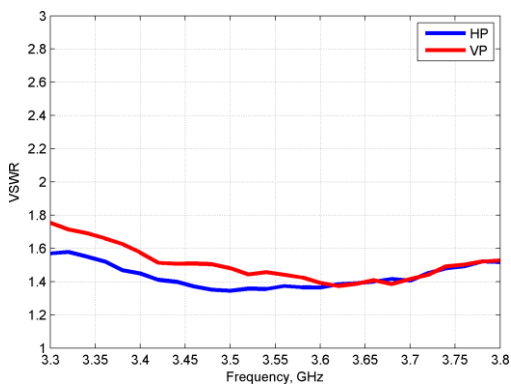


# Product Data Sheet

☎ 1-855-276-(KPPA) 5772 or 780-702-7577  
 📧 info@kppperformance.ca  
 ✉ 15497 117 Ave, Edmonton, AB T5M3X4, Canada  
 ✉ 5000 W. Proviso Dr, Unit #2 Melrose Park, IL 60163, USA

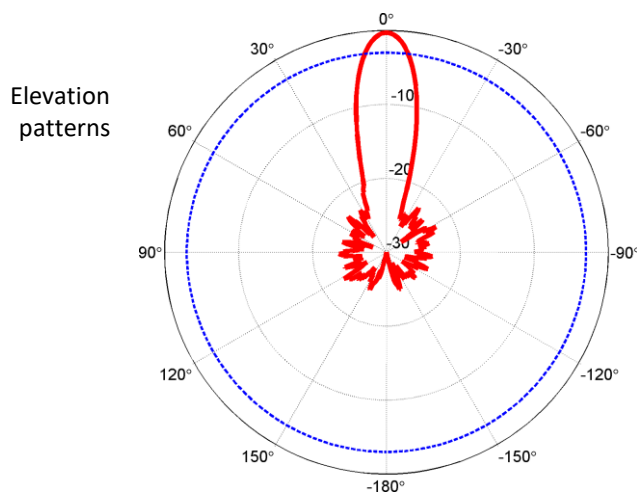

Part Number		KPPA-25.5-3GHZDPFHA	
<b>Electrical</b>		<b>Mechanical</b>	
Frequency range	3300-3800 MHz	Dimensions	28" x 23" x 25.5"
Polarization	V+H or +-45° slant	Weight	13 lb
Gain	25.5 dBi	Mounting method	Carriage bolts
Beamwidth 3dB	9.8 °	Mounting pole dia	1¼" – 4"
VSWR	< 1.5:1	Surface Finish	Matte powder coat
Return loss	> 14 dB	<b>Environmental</b>	
F/B ratio	> 32 dB	Temperature range	-40° to +60° C / +140° F
Cross pol rejection	> 25 dB	Wind speed	160 km/h / 100 mph
V/H port isolation	> 20 dB	UV protection	UV resistant powder coat
Input power	25 W max per port	Ingress protection	IP55 rain resistant
Impedance	50 Ω	Lightning Protection	Direct Ground
Connector Type	Type N Female x 2		

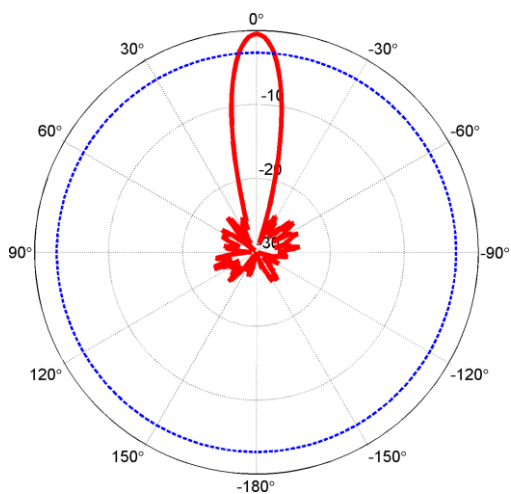

ANTENNAS ENGINEERED & MANUFACTURED TO EXCEED INDUSTRY STANDARDS