

# Product Specifications



1 ft ValuLine® High Performance Low Profile Antenna, single-polarized, 17.7–19.7 GHz



## CHARACTERISTICS

### General Specifications

Antenna Type	VHLP - ValuLine® High Performance Low Profile Antenna, single-polarized
Diameter, nominal	0.3 m   1 ft
Antenna Input	Motorola ODU interface
Polarization	Single
Reflector Construction	One-piece reflector
Antenna Color	White
Radome Color	White
Radome Material Description	Polymer
Flash Included	No
Packing	Standard pack

### Electrical Specifications

Operating Frequency Band	17.700 – 19.700 GHz
Gain, Top Band	34.5 dBi
Gain, Mid Band	34.2 dBi
Gain, Low Band	33.6 dBi
Front-to-Back Ratio	57 dB
Cross Polarization Discrimination (XPD)	30 dB
Beamwidth, Vertical	3.3 °
VSWR	1.30
Return Loss	17.7 dB
Radiation Pattern Envelope Reference (RPE)	7010C

# Product Specifications



Electrical Compliance

Brazil Anatel Class 2 | ETSI 302 217 Class 2


## Mechanical Specifications

Wind Velocity Operational	113 km/h   70 mph
Wind Velocity Survival Rating	249 km/h   155 mph
Fine Azimuth Adjustment	$\pm 10^\circ$
Fine Elevation Adjustment	$\pm 25^\circ$
Mounting Pipe Diameter	50 mm–115 mm   2 in–4.5 in
Side Struts, Included	0
Side Struts, Optional	0
Net Weight	6 kg   14 lb

## Wind Forces At Wind Velocity Survival Rating

Axial Force (FA)	445 N   100 lbf
Side Force (FS)	196 N   44 lbf
Twisting Moment (MT)	159 N•m
Zcg without Ice	47 mm   2 in
Zcg with 1/2" (12 mm) Radial Ice	91 mm   4 in
Weight with 1/2" (12 mm) Radial Ice	12 kg   27 lb

## Wind Forces At Wind Velocity Survival Rating Image

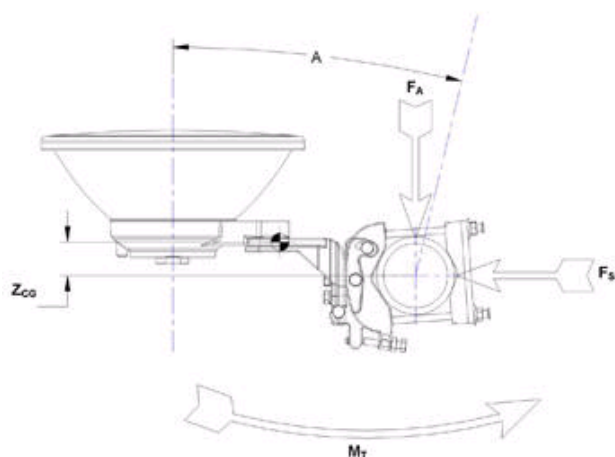

## Packed Dimensions

Gross Weight, Packed Antenna	8.9 kg   19.7 lb
Length	635.0 mm   25.0 in


# Product Specifications



Width	457.2 mm   18.0 in
Height	323.9 mm   12.8 in
Volume	5737.5 in <sup>3</sup>

# Product Specifications

## Antenna Dimensions And Mounting Information

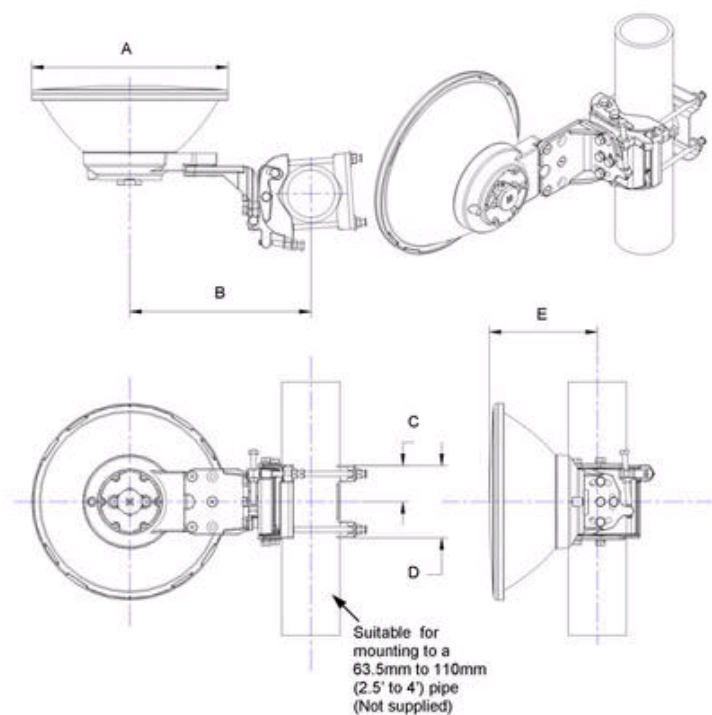

ANTENNA DIMENSIONS			
All dimensions in mm (inches)			
A	389 (15.3)	D	143 (5.6)
B	358 (14.1)	E	220 (8.7)
C	72 (2.8)		

### \* Footnotes

#### Axial Force (FA)

Maximum forces exerted on a supporting structure as a result of wind from the most critical direction for this parameter. The individual maximums specified may not occur simultaneously. All forces are referenced to the mounting pipe.

#### Cross Polarization Discrimination (XPD)

The difference between the peak of the co-polarized main beam and the maximum cross-polarized signal over an angle twice the 3 dB beamwidth of the co-polarized main beam.

#### Front-to-Back Ratio

Denotes highest radiation relative to the main beam, at  $180^\circ \pm 40^\circ$ , across the band. Production antennas do not exceed rated values by more than 2 dB unless stated otherwise.

#### Gain, Mid Band

For a given frequency band, gain is primarily a function of antenna size. The gain of Andrew antennas is determined by either gain by comparison or by computer integration of the measured antenna patterns.

# Product Specifications



Operating Frequency Band	Bands correspond with CCIR recommendations or common allocations used throughout the world. Other ranges can be accommodated on special order.
Packing	Andrew standard packing is suitable for export. Antennas are shipped as standard in totally recyclable cardboard or wire-bound crates (dependent on product). For your convenience, Andrew offers heavy duty export packing options.
Radiation Pattern Envelope Reference (RPE)	Radiation patterns determine an antenna's ability to discriminate against unwanted signals under conditions of radio congestion. Radiation patterns are dependent on antenna series, size, and frequency.
Return Loss	The figure that indicates the proportion of radio waves incident upon the antenna that are rejected as a ratio of those that are accepted.
Side Force (FS)	Maximum axial forces exerted on support structures by side struts as a result of a 200 km/h (125 mph) wind from the most critical direction and extreme angle permitted. The forces are a component of, not in addition to, the maximum forces specified above.
Twisting Moment (MT)	Maximum forces exerted on a supporting structure as a result of wind from the most critical direction for this parameter. The individual maximums specified may not occur simultaneously. All forces are referenced to the mounting pipe.
VSWR	Maximum; is the guaranteed Peak Voltage-Standing-Wave-Ratio within the operating band.
Wind Velocity Operational	The wind speed where the antenna deflection is equal to or less than 0.1 degrees.
Wind Velocity Survival Rating	Microwave antennas, including mounts and radomes, where applicable, will withstand the simultaneous wind and ice conditions as specified.