



PRO-SEC5018DP

Key Features:

- 2x18 dBi Sectoral Gain
- Dual Polarization H&V in One Case
- Integrated enclosure
- Special Outdoor Weatherproof Enclosure Dedicated for Mikrotik RouterBOARDS
- Mounting for Ubiquiti Rocket
- High Quality Construction
- Heavy-Duty Mounting Elements
- Easy Elevation and Tilt Adjustment
- 5 Years Warranty
- Designed for All Weather Operation



Applications:


- 5 GHz Band Wireless LAN
- N stream dual configuration
- 802.11n/MIMO standard
- IEEE 802.11a WLAN Systems
- Point to Multipoint Applications

Description:


Antenna with multipurpose enclosure working in 5 GHz band with two independent sector antennas with 18 dBi gain with vertical and horizontal polarization. It is the ideal solution for MIMO and Nstream dual configuration. The range includes weatherproof outdoor enclosure with panel antenna and enough compartment for RouterBoard or any other electronic equipment. Enclosure is furnished with special RJ-45 waterproof ethernet connector with an easy connection to Internet Network and PoE. Perfectly designed for operation under severe weather conditions. Proper materials allow operation in the salty water environment without corrosion. Professional mounting system with 0-15 degrees scale guarantees easy and smooth tilt down as well as rock-stable operation. This product is well suited to point to multipoint applications for highly professional solutions. Inside the enclosure are suitable posts for **Mikrotik RouterBOARDS 411 and 433 series**.

Electrical Properties	
Frequency	5.15
Gain	2x18dBi
Polarization	dual H&V
Beamwidth deg horizontal	90°(-3dB), 120°(-6dB)
Beamwidth deg vertical	6°
VSWR	<1,8
Impedance	50 ohm
Front to back ratio	> 35 dB
Port Isolation	> 45 dB
Lightning protection:	DC ground
Enclosure Properties	
Technology:	Microstrip
Material:	UV protected
Colour:	Grey
Min temperature:	-40°C / -40°F
Max temperature:	80°C / 176°F
Mechanical Properties	
Compatible with:	RB411 and RB433, Ubiquiti Rocket
Input Connector	2x pigtail UFL, MMCX or RPSMA
Enclosure Connector	Waterproof Ethernet Connector RJ45
Outside Dimensions	580x150x60mm / 22.8x5.9x2.4"
Weight	2.1kg / 4.7lbs

Specification subject to change without notice.

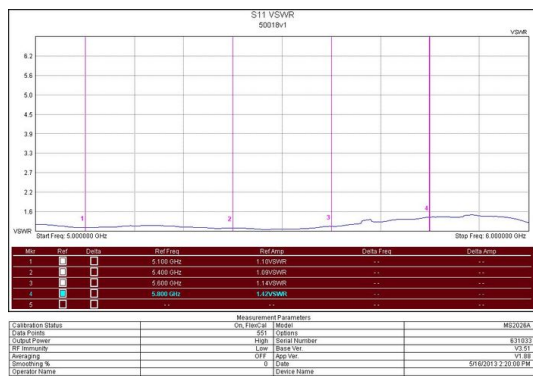

VSWR port V

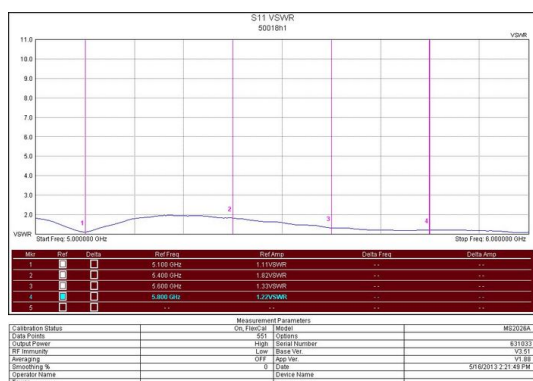

VSWR port H