

GP-24SR





2.4GHz Omnidirectional Base Antenna

GP-24S Specifications

- 2400-2500Mhz
- VSWR: less than 1.5:1
- Gain: 9.9dBi
- Length: 3 ft 9 inches
- Weight: 1 lbs 14 oz (inc brackets)
- -3dB Beam-width: 9 degrees
- Cross polar rejection: 20dB+
- Max Power: 100 watts
- Max Wind Survival: 150MPH
- Wind Load: 26.9 sq in (0.187 sq ft)
- Mast Required: 1.25-2.5 inches
- Connector: Weather protected integral N-female
- Radome: Heavy wall one piece white UV stabilized fiberglass.
- RoHS Compliant
- Mounting hardware included

Vertical radiation pattern

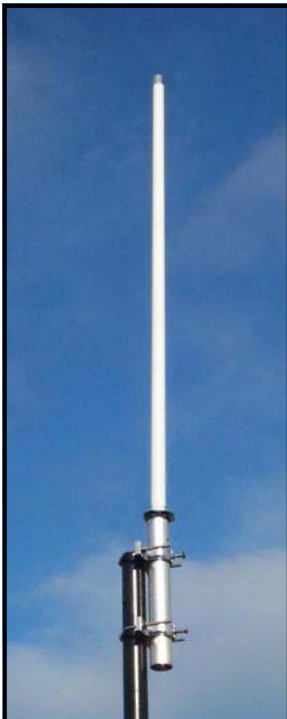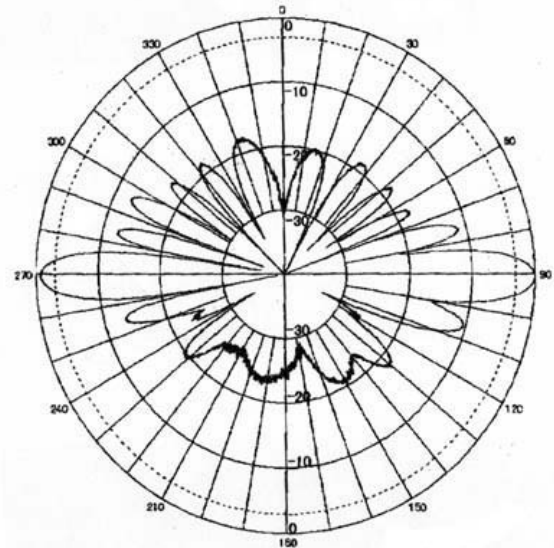

FEATURES

- High gain omnidirectional pattern for medium to long range point-to-multipoint applications plus excellent fill-in beneath the antenna.
- The mounting pipe protects the coax to antenna connection from rain/ice/moisture.
- Heavy duty fiberglass radome, 150+ MPH wind survival
- Extruded aluminum mounting brackets, stainless steel u-bolts/hardware.
- Ideal for the license free 2.4GHz ISM band using the 802.11b and 802.11g standards.

NCG COMPANY
15036 Sierra Bonita Lane
Chino, CA 91710

Phone: 800-962-2611
909-393-6133

Fax: 909-393-6136

email: sales@natcommgroup.com

Manufactured by: Comet Company Ltd.

