

POE /Solar Charge Controllers

Features

- Dual Input - Charges 12V or 24V Batteries from Solar Panel and / or Passive POE
- Built in DC to DC converter with various Passive POE output voltages available: 12V,18V,24V,48V
- Compact and high temperature operation
- Low self consumption < 0.5W

Applications

- Remote Power Systems; Surveillance, Sensors
- Wireless Stations ; AP / Client / Repeater
- UPS Systems ; Lighting, Fences, Gates



TP-SCPOE Charge Controller

Description

Tycon Power Systems unique POE/Solar charge controllers have dual inputs to charge batteries from a POE source and also a secondary source like solar panels in order to provide redundancy and insure 100% uptime for critical applications. The solar panel input takes priority so that when the sun is shining the grid power usage is minimized. They have a built in POE inserter with DC to DC converter that delivers 12V, 18V, 24V or 48V at the POE port. They have full electronic protections for short circuit, reverse current, overvoltage, overcharge and over discharge.

They have five LED indicators to give a quick visual status if current is being supplied by a POE source or solar panel, if battery is charging, if load output is turned on and a warning if battery is connected with reverse polarity. Solar and Battery Connections are via 5 screw terminals for wire size up to 10AWG. POE Input and Output is via 2 RJ45 shielded connectors. There is a secondary output connector on the back with 5 screw terminals for connecting other electronics to the controller using up to 10AWG wire. This secondary output is equal to the battery voltage except it also has overvoltage protection. The controllers are externally fused with a standard replaceable fuse.




There are two separate 12V output connections Gnd (or V-) and +12V (or V+):
 Gnd-1 and +12V-1
 Gnd-2 and +12V-2

FG = Frame Ground – Do not connect this to the GND 1 or 2 terminals. Frame Ground may be left unconnected or connected to earth ground.

TP-SCPOE-1212	12V 12W POE
TP-SCPOE-1218	18V 30W POE
TP-SCPOE-1224	24V 30W POE
TP-SCPOE-1248	48V 30W POE

Typical Application TP-SCPOE-12xx

Dual Input / Dual Output 12V
Battery Charge Controller

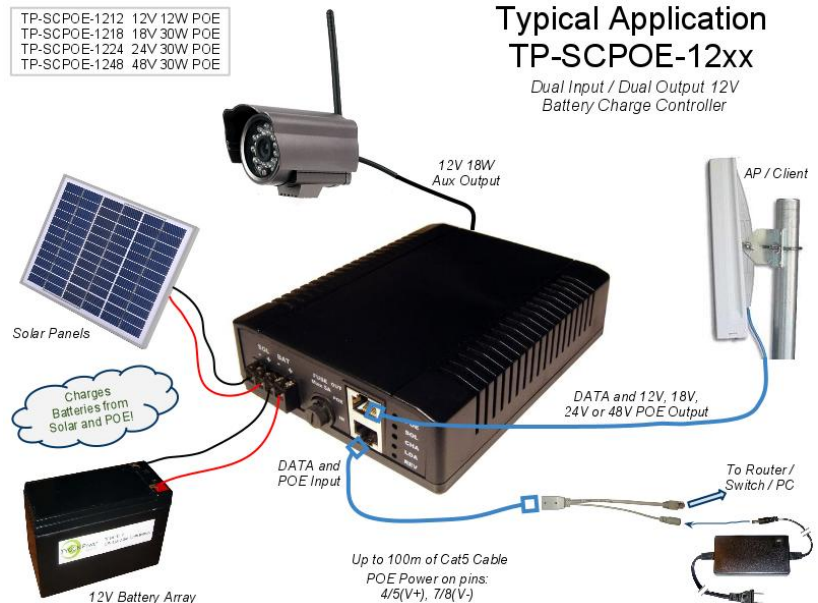

Specifications

	TP-SCPOE-1212	TP-SCPOE-1218	TP-SCPOE-1224	TP-SCPOE-1248	TP-SCPOE-2424
Solar Input Voltage	15V - 36V _{max} @ 8A max (up to 135W 12V or 270W 24V solar panel)				24V - 36V _{max} @ 8A max (up to 270W 24V Panel)
POE Input Voltage	18V - 57V _{max} @ 2.6A max				36V - 57V max @ 1.3A max
Battery Voltage	12V				24V
POE Output	12V @ 1A	18V @ 1.67A	24V @ 1.25A	48V @ .625A	24V @ 1.0A
Secondary Output	12V @ 1.5A max				20V to 25V @ 1.5A max
Charge Voltage	14.6 +/- 0.3V				28.6 +/-0.5V
Maintenance Voltage	13.5 +/-0.3V				27.3 +/- 0.5V
Over Discharge Voltage	Output OFF: 11.0 +/-0.3V Output ON: 12.0 +/-0.3V				20.0 +/-0.3V 22.3 +/-0.3V
Self Consumption	< 0.5W				
Max Wire Size	10 AWG				
Operating Temp	-30°C to 60°C (-22°F to 140°F)				
Dimensions	159 x 118 x 40mm (6.3 x 4.6 x 1.6")				
Weight	312 g (11 oz)				

POE Pinout

RJ-45 Input (Data & Power)			RJ-45 Output (Data & Power)	
Pin	Symbol	Description	Symbol	Description
1	RX+	Data Receive(+)	RX+	Data Receive(+)
2	RX-	Data Receive(-)	RX-	Data Receive(-)
3	TX+	Data Transmit(+)	TX+	Data Transmit(+)
4	+Vdc in	DC Power to battery charge circuit	+Vdc out	DC power(+) to device
5	+Vdc in	DC Power to battery charge circuit	+Vdc out	DC power(+) to device
6	TX-	Data Transmit(-)	TX-	Data Transmit(-)
7	-Vdc in	DC Power to battery charge circuit	-Vdc out	DC power(-) to device
8	-Vdc in	DC Power to battery charge circuit	-Vdc out	DC power(-) to device

Notes:

- All shipments F.O.B. Draper, UT 84020
- TP-SCPOE Charge Controllers carry a 1 year warranty

System Ordering:

TP-SCPOE-1212 12V in 12V out POE/Solar Charge Controller
TP-SCPOE-1218 12V in 18V out POE/Solar Charge Controller
TP-SCPOE-1224 12V in 24V out POE/Solar Charge Controller
TP-SCPOE-1248 12V in 48V out POE/Solar Charge Controller

TP-SCPOE-2424 24V in 24V out POE/Solar Charge Controller for 24V battery systems

For further information contact:

Tyconpower.com



693 Draper Heights Way Ste 102
 Draper, UT 84020
 PH: 801-432-0003
 FAX: 801-618-4220