

4.9 GHz to 5.9 GHz, 45 Degree Sector Antenna, 20.5 dBi, 2-Port, +/-45 Slant

**KPP-5DP45S-45**



**Features**

- High-performance gain and patterns that are stable over a wide bandwidth
- Interference mitigation with highly suppressed side-lobes and superior front-to-back that allows channel reuse
- Universal radio bracket with quick-release slot/clip design is compatible with many AP radios
- Ultra-wide bandwidths for world-wide markets
- Integrated hoisting hook for added safety and convenient installation
- Null fill improves coverage near the tower
- -5 to 15 Degrees Mechanical Tilt

**Applications**

- Wireless MIMO LAN systems & IEEE 802.11n applications
- Point-to-multipoint (PtMP) requiring sectorial coverage
- Supports public safety (4.9 GHz), U-NII-1, 2, 3, and 4 (5.15-5.925 GHz), and up to 6.4GHz for world-wide market
- Mobile WiMAX Wireless Internet Provider “cell” sites
- High-density deployments requiring frequency reuse to achieve high capacity and data rates
- Macro base station or small cell deployments

**Description**

The KP-5DP65S-45 is a 5 GHz ProLine Sector Antenna with a 3 dB beamwidth of 45°, high gain of 20.5 dBi, two ports with + / - 45 slant polarization, and operates over an ultra-wide bandwidth of 4.9 GHz to 5.9 GHz. The sector antenna has an aesthetically small footprint and delivers consistent gain in its coverage area.

This sector antenna offers side lobes suppression and a front to back over 40 dB while retaining a high gain that outperforms asymmetric horn antennas of the same 3dB azimuth beamwidth. The highly suppressed side lobes and superior front to back allows for channel (frequency) reuse and can reach high levels of spectral efficiency in the most challenging and noisy environments. The polarization is + / - 45 slant, making the sector compatible with many 4.9 GHz to 5.9 GHz single or dual polarization 2 x 2 MIMO radios.

The antenna comes with rugged powder-coated aluminum brackets and features an Integrated hoisting hook for added safety and convenient installation. The sector antenna features a heavy-duty UV-resistant ABS radome and anodized aluminum reflector for all-weather operation. This ProLine Sector antenna is packaged with a rugged universal radio bracket that is compatible with many popular Cambium, Ubiquiti, Mimosa, and Baicells radios and can be retrofitted for many more.

**Configuration**

Design	Sector
Band Type	Single
Radiation Pattern	Directional
Polarization	±45 Deg. Slant
Connector Type	N Female
Number of Ports	2
Lightning Protection	RF connector grounded to reflector and mounting bracket
Housing Material and Plating	Anodized aluminum

**Electrical Specifications**

Description	Minimum	Typical	Maximum	Units
Frequency Range	4.9		5.9	GHz
Input VSWR		1.5:1		
Impedance		50		Ohms

Click the following link (or enter part number in “SEARCH” on website) to obtain additional part information including price, inventory and certifications:  
[4.9 GHz to 5.9 GHz, 45 Degree Sector Antenna, 20.5 dBi, 2-Port, +/-45 Slant KPP-5DP45S-45](#)

4.9 GHz to 5.9 GHz, 45 Degree Sector  
 Antenna, 20.5 dBi, 2-Port, +/-45 Slant

**KPP-5DP45S-45**



Gain	20	dBi
Electrical Downtilt	0	Degrees
Input Power	100	Watts

**Specifications by Band**

Description	Band 1	Band 2	Band 3	Band 4	Band 5	Units
Range	4.9 to 5.4	5.4 to 5.9				GHz
Gain	20	20.5				dBi
Horizontal HPBW	45	43				Degrees
Horizontal Squint (±)	1	1				Degrees
Vertical HPBW	6.5	6.2				Degrees
Electrical Downtilt	0	0				Degrees
Cross Polar Ratio HPBW	20	19				dB
Port Isolation	31	35				dB
Front to Back Ratio	40	38				dB
VSWR Max	1.7:1	1.7:1				

**Mechanical Specifications**

Radome Material	UV resistant PVC
Housing Material	Anodized aluminum
<b>Size</b>	
Length	20 in [508 mm]
Width	5 in [127 mm]
Height	2.5 in [63.5 mm]
Mounting Mast Diameter	0.75 to 4.5 in [19.05 to 114.30 mm]
Weight	12 lbs [5.44 kg]

**Environmental Specifications**

<b>Temperature</b>	
Operating Range	-40 to +60 deg C
Mechanical Tilt	15 Degrees
Wind Survivability	125 MPH [201.17 KPH]

**Plotted and Other Data**

Notes:


Click the following link (or enter part number in "SEARCH" on website) to obtain additional part information including price, inventory and certifications:  
[4.9 GHz to 5.9 GHz, 45 Degree Sector Antenna, 20.5 dBi, 2-Port, +/-45 Slant KPP-5DP45S-45](#)

4.9 GHz to 5.9 GHz, 45 Degree Sector  
 Antenna, 20.5 dBi, 2-Port, +/-45 Slant

**KPP-5DP45S-45**



Typical Radiation Pattern

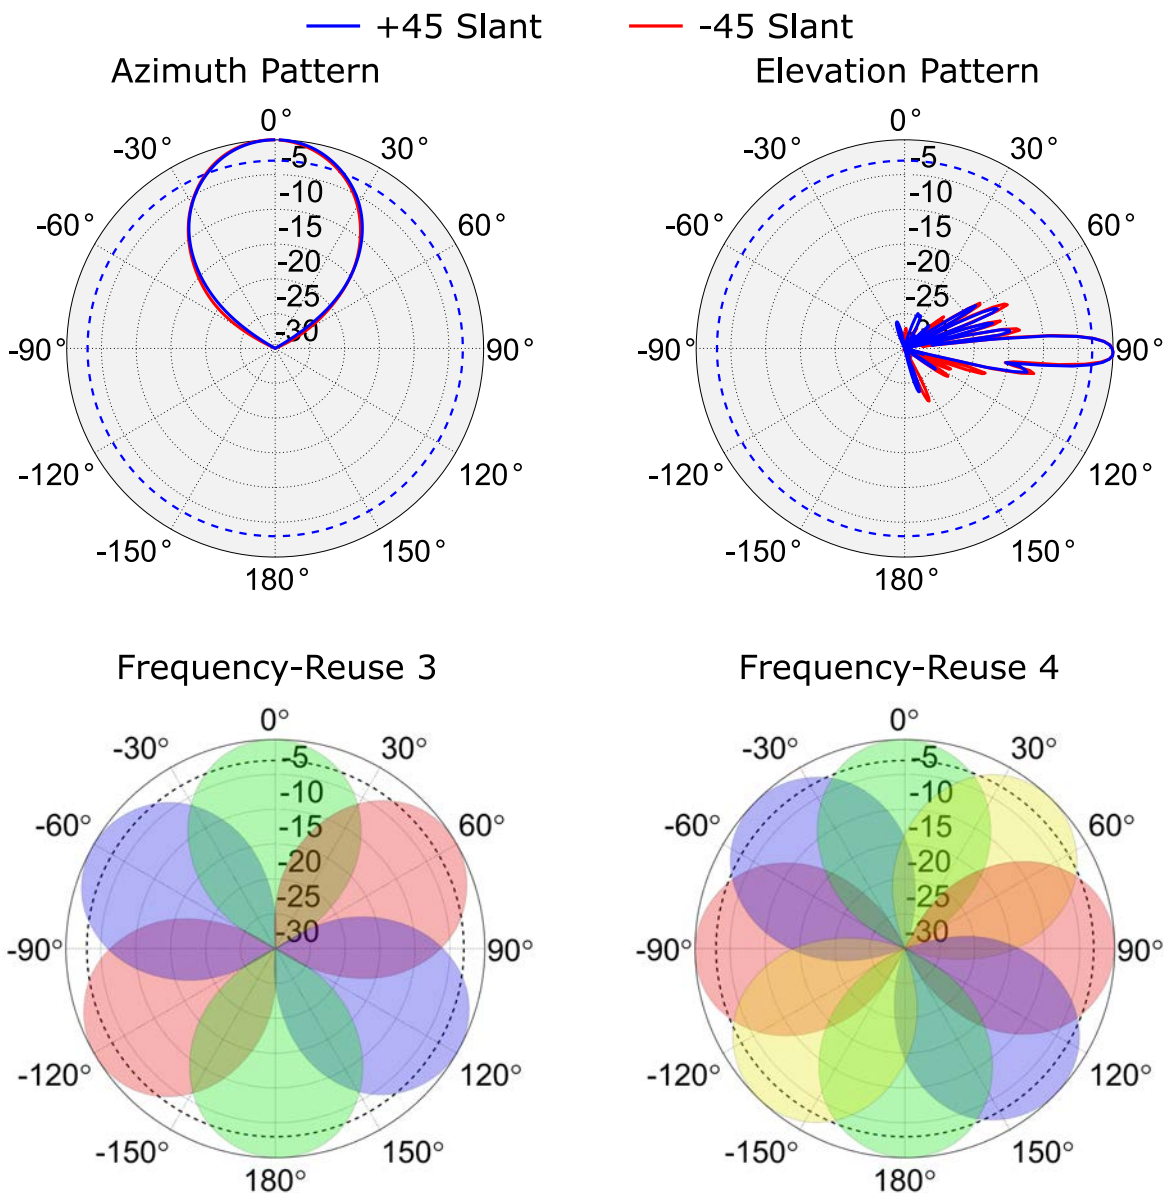

Click the following link (or enter part number in "SEARCH" on website) to obtain additional part information including price, inventory and certifications:  
[4.9 GHz to 5.9 GHz, 45 Degree Sector Antenna, 20.5 dBi, 2-Port, +/-45 Slant KPP-5DP45S-45](#)

4.9 GHz to 5.9 GHz, 45 Degree Sector  
Antenna, 20.5 dBi, 2-Port, +/-45 Slant

**KPP-5DP45S-45**



## Appendix

**Electrical Downtilt:** Angle in the antenna's elevation pattern in which the maximum gain occurs.

**Gain:** Antenna's average gain.

**Front to Back Ratio @ 180°±30°:** Average difference between the antenna's maximum gain and the maximum gain in the antenna's back lobe over ±30° angles.

**Cross-polarization Ratio (dB):** Typical difference between the co-polarization and cross-polarization gain across the sector's 3 dB Beam Width.

Dedicated to serving the needs of the Wireless Internet Service Provider (WISP) market, KP Performance Antennas offers purpose built products that reliably perform in the field. KP Performance Antennas product line consists of Yagi, Grid, Omni, Dish and other style antennas that operate in the 900 MHz, 2.4 GHz, 3 GHz, and 5 GHz frequencies.

Click the following link (or enter part number in "SEARCH" on website) to obtain additional part information including price, inventory and certifications: [4.9 GHz to 5.9 GHz, 45 Degree Sector Antenna, 20.5 dBi, 2-Port, +/-45 Slant KPP-5DP45S-45](#)

URL: <https://www.kpperformance.com/KPP-5DP45S-45-p.aspx>

The information contained within this document is accurate to the best of our knowledge and representative of the part described herein. It may be necessary to make modifications to the part and/or the documentation of the part in order to implement improvements. KP Performance reserves the right to make such changes as required. Unless otherwise stated, all specifications are nominal. KP Performance does not make any representation or warranty regarding the suitability of the part described herein for any particular purpose, and KP Performance does not assume liability arising out of the use of any part or document.

4.9 GHz to 5.9 GHz, 45 Degree Sector Antenna, 20.5 dBi, 2-Port, +/-45 Slant

KPP-5DP45S-45 CAD Drawing

