


RB/564 RouterBOARD 564 daughterboard, 2 MiniPCI, 8 Eth.

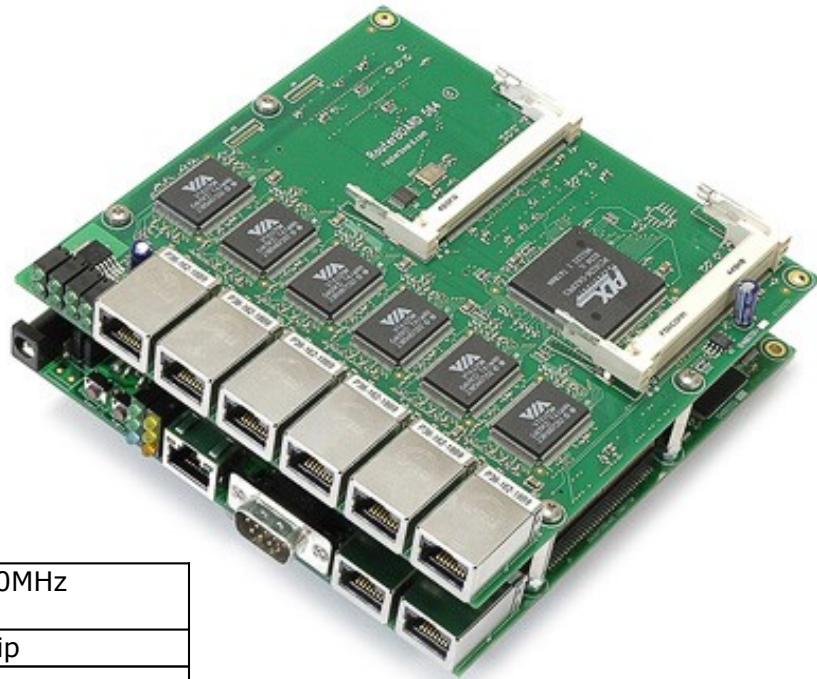

Specifications

CPU	MIPS32 4Kc based 266MHz (400MHz optional) embedded processor
Memory	32MB DDR onboard memory chip
Boot loader	RouterBOOT, 1Mbit Flash chip
Data storage	64MB/128MB onboard NAND memory chip, CompactFlash type I/II slot (also supports IBM/Hitachi Microdrive)
Ethernet	One IDT Korina 10/100 Mbit/s Fast Ethernet port supporting Auto-MDI/X, Eight VIA VT6105 10/100 Mbit/s Fast Ethernet ports supporting Auto-MDI/X
MiniPCI slot	Four MiniPCI Type IIIA/IIIB slots
Serial port	One DB9 RS232C asynchronous serial port
LEDs	Power, 2 LED pairs for MiniPCI slots, 1 user LED
Watchdog	IDT internal SoC hardware watchdog timer
Power options	IEEE802.3af Power over Ethernet: 12V or 48V DC mode, Power jack/header 6..22V or 25..56V DC jumper selectable
Dimensions	14.0 cm x 14.0 cm (5.51 in x 5.51 in)
Weight	140 g (4.9 oz)
Temperature	Operational: -20°C to +70°C (-4°F to 158°F)
Humidity	Operational: 70% relative humidity (non-condensing)
Power consumption	2-3W without extension cards. Maximum - 4.25 (14W) with base voltage 3.3V

Distribuidor autorizado:

Mikrotik-México
 info@index.com.mx
 www.mikrotik-mexico.com.mx

Ignacio Zaragoza 444 Nte. Despacho 511
 Edificio San Isidro Col. Centro. Los Mochis Sinaloa.
 Tel./Fax.01(668)812-52-12, 01-800-716-0708