

SF-245G+12XSR





2.4GHz Mesh A/P antenna, 12 deg up-tilt

Specifications:

- 2400-2500MHz
- 12 degree uptilt
- Elevated feed-point to avoid obstructions
- Gain: 7.4dBi
- Length: 24.25 inches
- Weight: 6.7 oz
- -3dB Beam-width: 20 degrees
- Cross Polar Rejection: 15dB +
- Max Power: 50 watts
- Max wind survival: 150MPH +
- Wind Load: 9.5 sq in
- Connector: Integral N-male
- Radome: Grey UV stabilized fiberglass
- Radome cap color: White
- Mast mounting hardware optional
- Lightning protection installed
- RoHS Compliant

Vertical radiation pattern

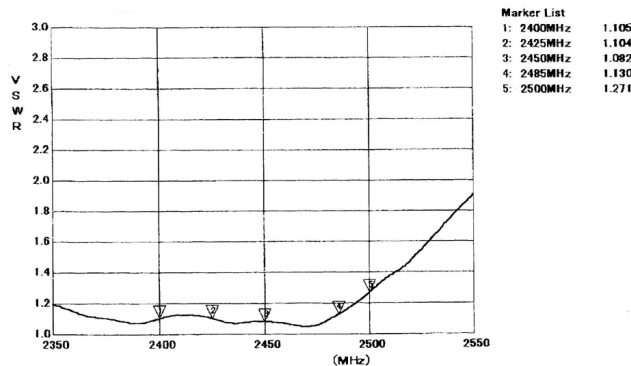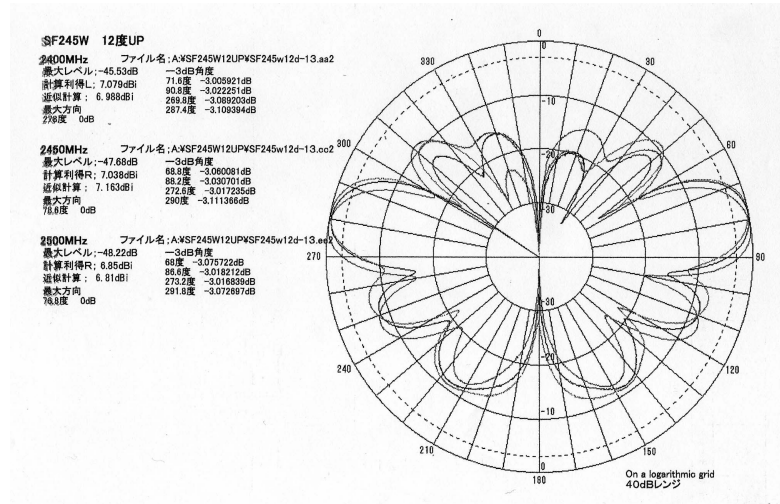

VSWR:

1.13:1 or less

NCG Company

15036 Sierra Bonita Lane
Chino, A 91710

Phone: 800-962-2611 909-393-6133

Fax: 909-393-6136

Email: sales@natcommgroup.com

FEATURES:

- 802.11b and 802.11g compatible
- Lightning protection installed
- Inverted installation provides 12 degree downtilt
- Male N-connector for easy installation
- Compact gain antenna for point-to-multipoint applications
- Heavy duty fiberglass for durability
- Weather proof for indoor or outdoor installation

Manufactured by: COMET Company Ltd.

