

AX5400 Tri-Band Wi-Fi 6 Router

Faster. Broader. Unstoppable.







Warp-Speed Wi-Fi up to 5400 Mbps[†]



Connect More Devices Tri-Band + OFDMA[‡] ((6)) Extensive Coverage 6 High-Performance Antennas



Powerful Processing Quad-Core CPU

Highlights

Wi-Fi 6 Faster. Broader. Unstoppable.

The Archer AX75, based on the next generation 802.11ax Wi-Fi technology, takes your Wi-Fi to the next level while being backwards compatible with 802.11a/b/g/n/ac Wi-Fi standards.



Robust Tri-Band

Tri-Band utilizes the most radio space to maximize network capacity. Combined with OFDMA, Archer AX75 provides congestion-free experiences with minimal latency.[‡]



TP-Link's premium security services keep your home network safe with cutting -edge features for network and IoT protection.[△]



Detect cyber threats to keep your privacy and connected devices well protected.



Super-Fast Wi-Fi

Enjoy full access to 8K streaming and high-speed downloading with HE160 on both 5 GHz bands providing doubled bandwidth.[‡]



Smart Power Saving

Conserve the power of your mobile devices by scheduling the connection time of battery-powered devices with Target Wake Time.



Backwards Compatible

Take your Wi-Fi to the next level while being backwards compatible with existing 802.11a/b/g/n/ac Wi-Fi standards.







Gain full statistics and insights to help you understand your home network.

TP-Link HomeShield

Network Protection

Quality of Service (QoS)

Prioritize your bandwidth needs to get a better networking experience.

Parental Controls

Manage online time and block inappropriate content to control your family's digital habits.


Comprehensive Reports

Highlights

Flexible Whole-Home Wi-Fi


Powerful 1.7 GHz CPU

Six high-performance antennas and Beamforming deliver broad coverage. Furthermore, Archer AX75 supports OneMesh™ to form seamless whole-home coverage, preventing drops and lag when moving between signals.

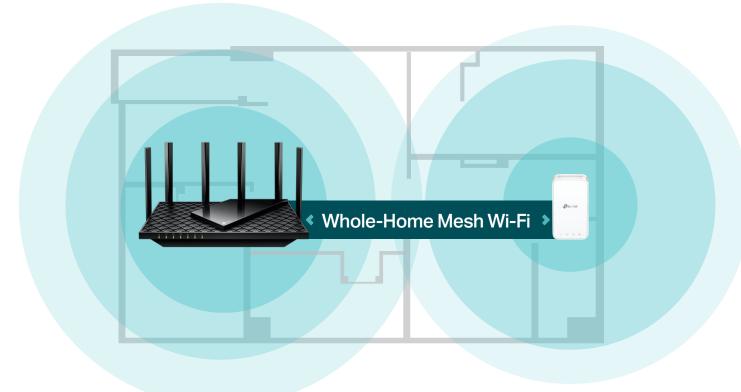


1.7 GHz Quad-Core CPU

A 1.7 GHz Quad-Core CPU provides the processing ability to handle enormous data throughput and minimizes the lag within your home network, giving you a smooth online experience.

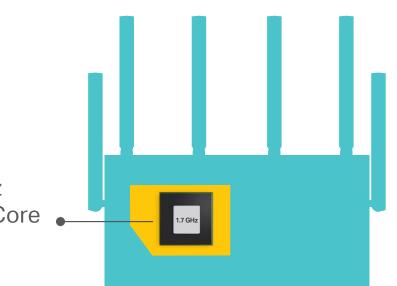


Features

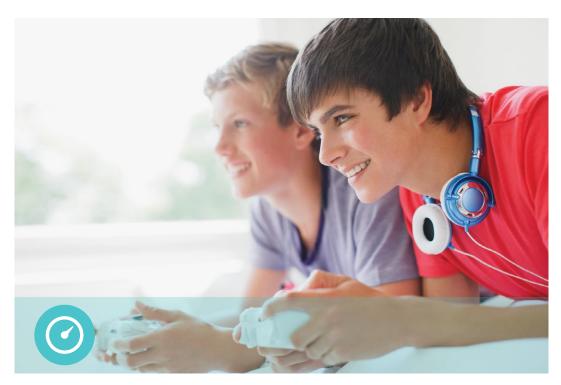

Speed

- Warp-Speed Wi-Fi 5.4 Gbps Wi-Fi for faster browsing, streaming, and downloading—all at the same time[†]
- Wi-Fi 6 Technology Wi-Fi 6 (802.11ax) features advanced technologies, including OFDMA, HT160, and 1024-QAM, drastically increasing the speed and efficiency of your entire network[‡]
- Tri-Band Capacity Provides additional spectrum to connect more wireless clients and minimize congestion.
- Connect More, Stay Fast Supports OFDMA to reduce congestion and quadruple your average throughput[§]

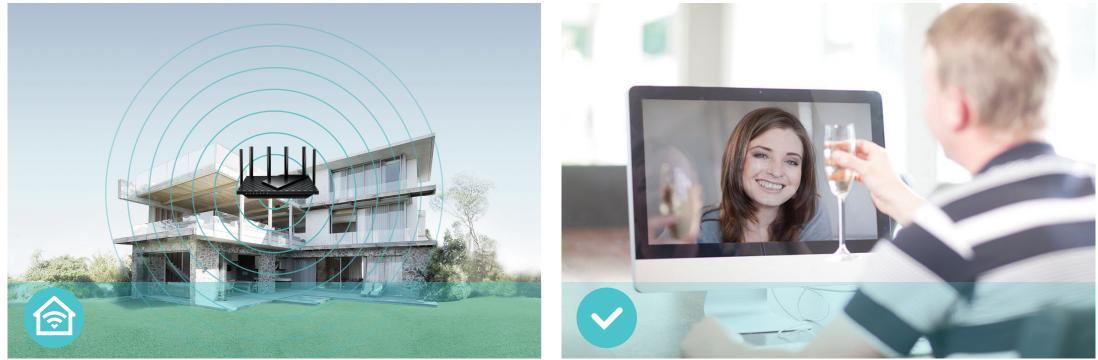


Wi-Fi Range

- Ultimate Range Wi-Fi Six high-gain external antennas deliver a Wi-Fi signal to every corner of your home, making all of your connections more efficient and stable
 Secure VPN Access – Connects to a private network with a safe and secure OpenVPN and PPTP VPN connection
- Beamforming Technology Concentrates Wi-Fi signals towards individual devices to ensure stronger connections
- Seamless OneMesh network Transfer between signals without any drops or lag and manage your whole network using a centralized panel

Reliability


- Airtime Fairness Balances bandwidth of connected devices to improve overall throughput and efficiency
 - Smart Connect Intelligently switches each device's connection to the optimum available Wi-Fi band

Features

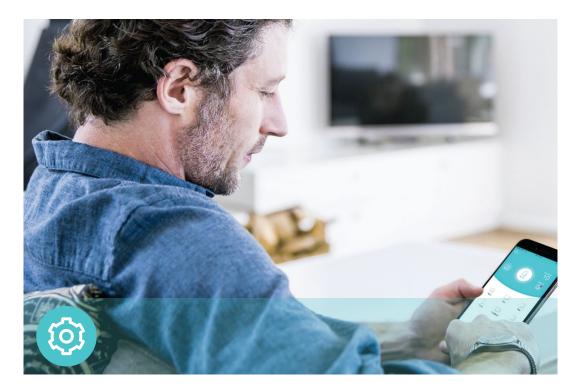

Ease of Use

- Intuitive Web UI Ensures quick and simple installation without hassle
- WPS (Wi-Fi Protected Setup) Help you to quickly and securely connect your devices to the router's network with a tap
- Power On/Off Conveniently power on or off your router as required
- Hassle-free Management with Tether App Network management is made easy with the TP-Link Tether app, available on any Android and iOS device

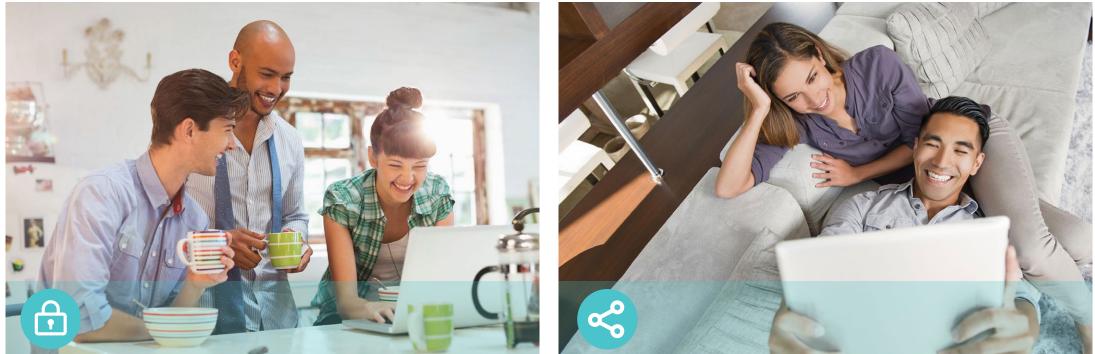

Security

- HomeShield TP-Link's premium security services keep your home network safe with cutting-edge features for network and IoT protection
 USB Port – Connects external storage devices to rapidly share files, photos, and videos
- Guest Network Provides separate access for guests to secure
 the home network
- Access Control Establishes a whitelist or blacklist to allow or restrict certain devices to access the internet
- Encryptions for Secure Network WPA/WPA2-Personal, WPA2/WPA3-Personal, WPA/WPA2-Enterprise encryptions provide active protection against security threats

Easy Sharing

Built-in Media Server – Allows you to play music, watch videos
 and view photos from any device on your network


Specifications

Wireless

- Standards: IEEE 802.11ax/ac/n/a 5 GHz, IEEE 802.11ax/n/b/g 2.4 GHz
- WiFi Speeds: 2402 Mbps (5 GHz) + 2402 Mbps (5 GHz) + 574 Mbps (2.4 GHz)[†]
- WiFi Range: 6× Fixed High-Performance Antennas, Beamforming
- WiFi Capacity: Tri-Band, OFDMA, Airtime Fairness, DFS, 6 Streams
- · Working Modes: Router Mode, Access Point Mode

Hardware

- Processor: 1.7 GHz Quad-Core CPU
- Ethernet Ports: 1 × Gigabit WAN Port, 4 × Gigabit LAN Ports
- USB Support: 1 × USB 3.0 Port
- · Buttons: LED On/Off Button, WPS Button, Wi-Fi On/Off Button, Reset Button, Power On/Off Button
- Power: 12 V/2.5 A

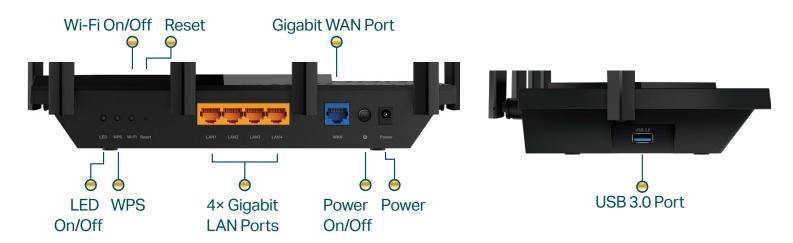

Security

- Layer Gateway, HomeShield Security
- · VPN Server: OpenVPN, PPTP

Software

- Protocols: IPv4, IPv6
- · Service Kits: HomeShield
- · OneMesh: Supported

- Quality of Service: QoS by Device

- · DDNS: TP-Link, NO-IP, DynDNS

• WiFi Encryption: WPA, WPA2, WPA3, WPA/WPA2-Enterprise (802.1x)

Network Security: SPI Firewall, Access Control, IP & MAC Binding, Application

• Guest Network: 1× 5 GHz Guest Network, 1× 2.4 GHz Guest Network

 Parental Controls: HomeShield Parental Controls • WAN Types: Dynamic IP, Static IP, PPPoE, PPTP, L2TP Cloud Service: Auto Firmware Upgrade, TP-Link ID, DDNS · NAT Forwarding: Port Forwarding, Port Triggering, DMZ, UPnP, Virtual Server

Specifications

Physical

- Dimensions (W×D×H): 10.7 × 5.8 × 1.9 in (272.5 × 147.2 × 49.2 mm)
- · Package Contents: Wi-Fi Router Archer AX75 Power Adapter RJ45 Ethernet Cable
- Quick Installation Guide

Other

System Requirements:

Internet Explorer 11+, Firefox 12.0+, Chrome 20.0+, Safari 4.0+, or other JavaScript-enabled browser

Cable or DSL Modem (if needed)

Subscription with an internet service provider (for internet access)

- Certifications: FCC, RoHS
- Environment:

Operating Temperature: 0°C~40°C (32°F ~104°F)

Operating Humidity: 10%~90% non-condensing



D For more information, please visit

http://www.tp-link.com/products/details/Archer-AX75.html

or scan the QR code left

¹Maximum wireless signal rates are the physical rates derived from IEEE Standard 802.11 specifications. Actual wireless data throughput, wireless coverage, and number of connected devices are not guaranteed and will vary as a result of network conditions, client limitations, and environmental factors, including materials, obstacles, volume and density of traffic, and client location.

[‡]Use of 802.11ax (Wi-Fi 6) and its features including OFDMA, 1024-QAM, HT160, and Target Wake Time requires clients support the corresponding features. Actual power reduction by Target Wake Time may vary as a result of network conditions, client limitations, and environmental factors. [§]The 802.11ax white paper defines standardized modifications to both the IEEE 802.11 Medium Access Control (MAC) layer as enabling at least one mode of operation capable of supporting improvement of at least four times the average throughput per station (measured at the MAC data service access) point) in a dense deployment scenario

HomeShield includes the Free Basic Plan. Fees apply for the Pro Plan. Visit tp-link.com/homeshield for more information

*Use of MU-MIMO and/or WPA3 requires clients to also support the corresponding features.

**This router may not support all the mandatory features as ratified in Draft 3.0 of the IEEE 802.11AX specification

***Further software upgrades for feature availability may be required.

©2021 TP-Link

Test Data

 WiFi Transmission Power: <29dBm (2.4GHz) WiFi Reception Sensitivity: 2.4 GHz: 5 GHz:

11ac VHT20 MCS0:-91dBm, 11ac VHT20 MCS11:-60dBm, 11ac VHT40 MCS0:-89dBm, 11ac VHT40 MCS11:-57dBm, 11ac VHT80 MCS0:-86dBm, 11ac VHT80 MCS11:-54dBm, 11ac VHT160 MCS0:-84dBm, 11ac VHT160 MCS11:-53dBm, 11ax HE20 MCS0:-90dBm, 11ax HE20 MCS11:-60dBm, 11ax HE40 MCS0:-88dBm, 11ax HE40 MCS11:-57dBm, 11ax HE80 MCS0:-85dBm, 11ax HE80 MCS11:-54dBm,

11ax HE160 MCS0:-83dBm, 11ax HE160 MCS11:-53dBm

FCC: <24dBm (5.25GHz~5.35GHz&5.47GHz~5.725GHz) <28dBm (5.15GHz~5.25GHz&5.725GHz~5.825GHz)

11ac VHT20 MCS0:-97dBm, 11ac VHT20 MCS11: -66dBm, 11ac VHT40 MCS0:-95dBm, 11ac VHT40 MCS11:-64dBm, 11ax HE20 MCS0:-95dBm, 11ax HE20 MCS11:-64dBm, 11ax HE40 MCS0:-92dBm, 11ac HE40 MCS11:-62dBm