



Swift FC Connectors



Key Features:

- Accordance with IEC61754-13, KS C6970(F01), JIS C5970(F01)
- Telcordia GR-326-core tested
- Enhanced high quality with improved optical features (Splice loss & return loss)
- Enhanced & improved highly tensile strength (exceeding 60N)
- Composed of 4(four) parts, after splicing can be easily assembled with One-Touch System
- Satisfied with Vertical Burn Test. Material compliance with UL94V-0
- Housing Color: SM-UPC (Blue), SM-APC (Green), MM (Beige)

Use:

- Medium and Long range optical transport circuit, LAN, CATV, FA, OA
- PC Transport system, measuring tools, etc.

Suppliers for: CATV, DATA, CCTV, Security, Telecom, Home Theater

101-9658 186th Street, Surrey, BC V4N 3N7 P. 604-882-0124
Toll Free: 1-800-667-4415 F.604-881-0004 www.selectcom.net




Item	Single Mode (SM)		Multi Mode (MM)	
	UPC	APC	UPC	
Fiber	SM 9/125		OM1(MM62.5/125)	OM2(MM50/125)
Insertion Loss	≤ average 0.2dB (≤ max 0.3dB)			
Return Loss	≥ 50dB	≥ 60dB	-	
Tensile Strength	≥ 34.3N (≥ 3.5Kgf) for 0.9mm fiber ≥ 60N (6.1Kgf) for 2.0, 3.0 cable, Indoor Cable			
Repeating Operation Test	500 Cycle, ≤ 0.2dB			
Temperature Range	-40°C~85°C			
Cable	0.9mm, 2.0, 2.4, 3.0mm cable, Indoor cable			

** Measurement Wavelength: Light Source LD, Wavelength 1550nm, Master code measurement (SC)
Light Source LD, Wavelength 1300nm, Master code measurement (MM)

** Option: Multimode OM3 (MM50/125, 100Gbps, 300m) fiber

Structural Features:

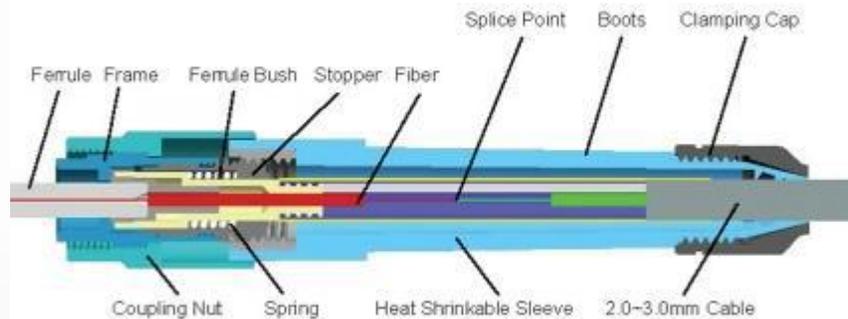

Suppliers for: CATV, DATA, CCTV, Security, Telecom, Home Theater

101-9658 186th Street, Surrey, BC V4N 3N7 P. 604-882-0124
Toll Free: 1-800-667-4415 F.604-881-0004 www.selectcom.net

www.selectcom.net